

Volume 9. No. 7, July 2021

International Journal
of Emerging Trends in Engineering Research
(IJETER)

ISSN (ONLINE) : 2347 - 3983



WARSE
www.warse.org

Editor in Chief

Dr. Weiqi Wang

Stanford University,
California, USA

Editorial Board Members

Dr. Amine Abdelmalek

Department of Mathematics and Computer Science
Faculty of Science and Technology
Taher Moulay University of Saida
Algeria

Dr. Priti Srinivas Sajja

PG Department of Computer Science
Sardar Patel University
Vallabh Vidyanagar 388 120
Gujarat, India

Prof. Bruno SOVIAC

Jean Monnet University, Telecom'St- Etienne
France

Dr. Abdel-Badeeh M. Salem

Professor of Computer Science
Head of Medical Informatics and Knowledge Engineering Research Unit,
Faculty of Computer and Information sciences
Ain Shams University
Abbasia, Cairo-Egypt

Dr. Ana Azevedo

ISCAP/IPP, Portugal

Dr. Mokhtar Beldjehem

The School of Information Technology and Engineering(SITE)
University of Ottawa, Ottawa
ON, Canada
mbeldjeh@uOttawa.ca

Dr. Mohamed BEN AHMED

Professor of Networks and Telecommunications
Faculty of Science and Technology of Tangier
Abdelmalek Essaadi University
Morocco

Dr. Muhammed Miah

Tennessee State University, USA
mmiah@suno.edu

Prof. (Dr.) Rajender Singh Chhillar

Maharshi Dayanand University, Haryana, India

Dr.B.Padmaja Rani

Jawaharlal Nehru Technological University, Hyderabad, India

Dr. Masoud Mohammadian

Associate Professor Information Systems
University of Canberra
Australia

Prof. Patricia Ordonez de Pablos

The University of Oviedo, Asturias,Spain

Dr. Satyadhyan Chickerur

B V Bhoomaraddi College of Engineering and Technology,Karnataka, India

Dr. Ioana Tuugalei Chan Mow

National University of Samoa, Apia, Samoa

Prof. SEDDIK BRI

Moulay Ismail University - Meknes , Morocco

Dr. D. S. R. Murthy

SreeNidhi Institute of Science and Technology, India

Dr Lim Sin Liang

Faculty of Engineering,
Multimedia University
Jalan Multimedia, 63100
Cyberjaya Selangor
Malaysia

lim.sin.liang@mmu.edu.my

Dr. Asoke Nath

Associate Professor
Department of Computer Science
St. Xavier's College(Autonomous)
30 Park Street
Kolkata-700016
India

Prof. Kareem Kamal

Computer & Information System Dept.
Cairo University
Egypt

kareem.ict@gmail.com

Dr. Seema Verma

Banasthali University, Rajasthan, India

Dr. Gerardo Matturro

Professor and Resercher
Universidad ORT Uruguay
matturro@uni.ort.edu.uy

Dr. TC Manjunath

Principal / Head of Institutions,
HKBK College of Engineering
Bangalore, Karnataka
India

Prof. Dr. R.Sathish Kumar

KL University, Green Fields, Andhra Pradesh, India

Dr. Munir Ahmed

Professor Computer Networks and Security Engineering
London College of Research, 43 West Street, Reading, RG1 1TZ, United Kingdom

Dr. Muhammad Sarfraz

College of Computing Sciences & Engineering
Kuwait University

prof.m.sarfraz@gmail.com

Dr. Kulkarni Satish Shankarrao

Dean and Professor, Mechanical Engineering
Padmabhooshan Vasantraodada Patil Institute of Techology Budhgaon, Dist: Sangli. Maharashtra, India
416304

kulsat@gmail.com

Dr. Daruru Venugopal

Siddhartha Group of Institutions, Hyderabad, India

Prof. T. Venkat Narayana Rao

C.S.E. Guru Nanak Engineering College, India

Dr. D.V. Chandra Shekar

T.J.P.S COLLEGE , Guntur, Andhra Pradesh, India

Dr. Saurabh Dutta

Dr. B. C. Roy Engineering College, West Bengal , India

Dr. Mohammad Israr

Dungarpur College of Engineering and Technology, Dungarpur, Rajasthan, India

Article - 1	Title	A Short Review on Fly Ash, Rice Husk Ash and Rice Husk Composites	841 – 845
	Authors	Aniket Mahadeo Kunbithop, Ganesh Shahaji Chavan, Omkar Shahaji Chavan, Krushna Sanjay Panchal, 2Akhya Kumar Behera	PDF
Article - 2	Title	Analysis of Credit Card Fraud detection using Machine Learning models on balanced and imbalanced datasets	846 – 852
	Authors	Manoj Kumar Reddy Mallidi, Yeshwanth Zagabathuni	PDF
Article - 3	Title	Effect of Oxide Shell on Aluminium Nanoparticle Oxidation Using Molecular Dynamics Simulation	853 – 858
	Authors	Haidzar Nurdiansyah, Boy Arief Fachri, Mahros Darsin	PDF
Article - 4	Title	The Factorial Design with the type of Plackett-Burman to Determine the Optimization in the Brown Rice Production Process	859 – 864
	Authors	B. Surapong, B. Phiraphan, B. Wiboonluk	PDF
Article - 5	Title	Effect of Paper Waste as Cement Replacement in Rammed Earth Construction	865 – 869
	Authors	Nouman Khan Usama, Khan Shahzada, Muhammad Alam, Sami Ullah Khan Babar	PDF
Article - 18	Title	Design and implementation of IOT based Gas detection & fire extinguishing System	944 – 949
	Authors	Mendi Manoj Kumar, Vendrapu Appala Naidu, Sunkarapalli Mohit,Patnayakuni Avyakth, Dr. B V S Acharyulu	PDF
Article - 19	Title	reCAPTCHA: Human Based Embedded Image Generation and Recognition for Web Security	950 – 959
	Authors	Khaled M. Alalayah	PDF
Article - 20	Title	VPN Encrypted Traffic classification using XGBoost	960 – 966
	Authors	Sami Smadia, Omar Almomanib, Adel Mohammadc, Mohammad Alauthmand, Adeeb Saaidahe	PDF
Article - 21	Title	Cyber Security Intelligence and Ethereum Blockchain Technology for E-commerce	967 – 972
	Authors	Mujeeb-ur-Rehman, Abdullah Lakhani, Zahoor Hussain, Fida Hussain Khoso, Aijaz Ahmed Arain	PDF
Article - 22	Title	Review on State of the Art in Flipped Classroom Technology A Blended E-Learning	973 – 982
	Authors	Anwar Ali Sathio, Mujeeb ur Rehman Shaikh, Ali Orangzeb Panhwar,Ubaid Rehman,M.Afzal Sahito,Abdullah Lakhani	PDF
Article - 23	Title	Synthesis of Zinc Oxide (ZnO) Nanoparticle using Non-Transferred DC Thermal Plasma Method: A Morphology Review	983 – 987
	Authors	Fabrobi Ridha, Salahuddin Junus, Mahros Darsin	PDF
Article - 25	Title	Design and Implementation of an Automatic Soil Moisture Sensor Irrigation System	994 – 998
	Authors	Dr. Amit Gangopadhyay	PDF
Article - 26	Title	Comparative Case Study Difference Between Azure Cloud SQL and Atlas MongoDB NoSQL Database	999 – 1002
	Authors	Fahim Uz Zaman, Mansoor Ahemed Khuhiro, Kamlesh Kumar, Naadiya Mirbahar, Muhammad Zohaib Khan, Ayesha Kalihoro	PDF
Article - 27	Title	Implementation of ETL Tool for Data warehousing for Non-Hodgkin Lymphoma (NHL) Cancer in Public Sector, Pakistan	1003 – 1007
	Authors	Anwar Ali Sathio, Mujeeb ur Rehman Shaikh, Ali Orangzeb Panhwar,M.Afzal Sahito, Abdullah Lakhani, Rajveer Singh	PDF

ACADEMIA

Accelerating the world's research.

Synthesis of Zinc Oxide (ZnO) Nanoparticle using Non-Transferred DC Thermal Plasma Method: A Morphology Review

WARSE The World Academy of Research in Science and Engineering


International Journal of Emerging Trends in Engineering Research

Cite this paper

Downloaded from [Academia.edu](#) 

[Get the citation in MLA, APA, or Chicago styles](#)

Related papers

[Download a PDF Pack](#) of the best related papers 



[Advancing National Development Through Microscopy Research Conference Proceedings 20...](#)
Gil Nonato Santos

[Dried particle plasma spray in-flight synthesis of spinel coatings](#)

Christian Coddet, Cathy Meunier

[Nanomaterials in science and technology](#)

claudia pinheiro



Synthesis of Zinc Oxide (ZnO) Nanoparticle using Non-Transferred DC Thermal Plasma Method: A Morphology Review

Fabrobi Ridha¹, Salahuddin Junus², Mahros Darsin³

^{1,2,3}Mechanical Engineering Department, University of Jember, 68121 East Java, Indonesia

¹ffridha@gmail.com, ²salahuddin.teknik@unej.ac.id, ³mahros.teknik@unej.ac.id

ABSTRACT

The increase of nanomaterial usage such as nano-ZnO application in developing countries is a type of progress that is beneficial from the engineering standpoint. Being able to control the results of nanomaterial production is crucial in this development. To control the outcome is to obtain ZnO nanomaterials properties which are suitable and in accordance to its intended application. This study focuses on the morphology of ZnO nanomaterials which are synthesized by non-transferred DC thermal plasma method. In this review, parameters of the apparatus regulating the outcomes of the synthesis is studied and analyzed to find certain guidelines that affect nanomaterial morphology. Some of the findings include the influence of non-transferred DC thermal plasma torches main variables such as gas output and power input which are involved in plasma jet production. It also finds precursor input techniques in which affects the ZnO nanomaterial production outcome. The study indicates that each production parameters on the DC thermal plasma device have different ways in affecting the morphology of the synthesized nanomaterial and it is possible to control them.

Key words : nanomaterial, thermal plasma, zinc oxide

1. INTRODUCTION

The use of nanotechnology in Indonesia is growing and we are now able to feel the presence of nanotechnology to meet the needs of Indonesian society. Nanotechnology is employed in computers, electronic products, cosmetics, fertilizers, polymers, supplements, and herbal medicines in the nation [1]. Nanotechnology however, is a technology that is still in its infancy for the nation. In the last fifty years, nanotechnology has undergone tremendous developments internationally indicated by thousands of nano designs that have been applied in various studies [2]. The presence of nano technology has an important role in the utilization of a material, especially in nano size which have advantages over materials that have a larger size [3]. The formation of

nanomaterials can be done through various methods, several methods are used, but in general the formation of nanomaterials is carried out through bottom-up and top-down methods [4]. In the bottom-up method, nanomaterials are formed by collecting atoms and molecules to form atomic clusters to form nanoparticles. This method generally involves chemical reactions, while the top-down method is the formation of nanomaterials by breaking bulk materials to be made into nanomaterials which can be done by mechanical methods.

One material synthesized into nanomaterial is Zinc Oxide. It is an inorganic compound which has wide band gap (3.37 eV) and large free exciton binding energy (60 meV) and other characteristics that can be applied in various fields [5]. These include fields for the development of piezoelectric, thermoelectric, photoelectric, anti-bacterial, and optical purposes, it also has an ability as a catalyst with non-toxic properties at certain concentrations [6], [7]. Some applications that are used using zinc oxide materials include: solar cells, antibacterials in polymers, medical purposes, cosmetics, coatings, piezoelectric sensors, and biosensors [7].

The method of manufacturing ZnO nanoparticles based on the production capacity is divided into two methods, namely Pyro metallurgical synthesis and Hydrometallurgical synthesis. Pyrometallurgical is further divided into indirect or French process and direct or American process. Small-scale production can be done by aqueous zinc salt solution, zinc nitrate solution extraction and pyrolysis, thin film deposition, gas phase synthesis, sol gel, hydrothermal plasma, chemical vapor deposition (CVD), and plasma methods [8].

A plasma method called DC Thermal Plasma (DCTP) method has some of the shortest processing time, fast chemical reactivity, and can be used with temperatures above 10000 K. It uses the high temperature and powder density which has a strong effect on the rate of nanoparticle production and coating processes. The approach of this technique is that it brings larger sized precursor materials to the nano size in matter of seconds. This is done by injecting it into the plasma flame by means of flow of gas. When passing through the

plasma flame, the material undergoes evaporation due to high plasma enthalpy. The material will vaporize and be rapidly cooled or quenched in the reactor tube with a drastic decrease in temperature [9]. The high quenching process causes the vapor to become highly saturated, which leads to the rapid and large number of nanoparticles produced through homogeneous nucleation, heterogeneous condensation and coagulation among the nanoparticles themselves. Nanoparticles synthesized are then collected by filters or directly deposited on the substrate to make nanostructured films or coatings [10]. Figure 1 shows the process on how the nanomaterials form from being fed to the plasma flame until the particles continue to build up and grow to particular nanostructures of zero to three dimensions. This demonstrates potential for both the synthesis of nanoparticles and the deposition of layers of nanoscale structures.

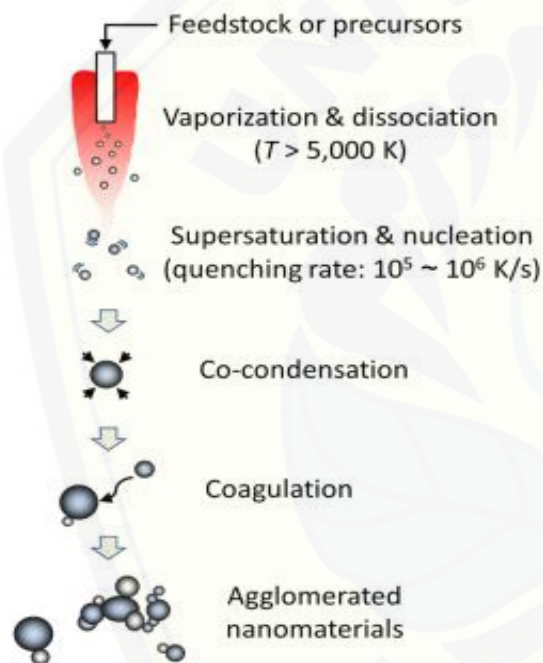


Figure 1. Nanofabrication using DCTP method [11]

After the period of nucleation and development, the ZnO crystallites would mainly develop into three dimensional objects with low index crystallographic faces [3]. There are also possibilities for zero- and one-dimension growth if the conditions are favorable. Crystals have different kinetic parameters for each crystal planes. The relative surface activities on the growth of facets are affected by many different conditions which are outlined in the next chapters.

2. PLASMA JET

One of the most important if not the most important component in the synthesis method is the plasma flame jet. As it is the subject that essentially transforms the materials and

vaporizing it to be treated. The DC is usually chosen because the DC type plasma arc from the generator is stable in operation, with good control, low electrode consumption, fairly low refractory wear and low power consumption [12]. The DCTP method utilizes active substances found in plasma energy including ions, electrons, and radicals with high temperature and energy density. The energy is from the jet itself which is also dependent upon other variables that contribute to the conditions of the plasma such as the torch properties and the input gas properties.

2.1 Torch Properties

Plasma jets are generated using the torch apparatus. There are several types of plasma arc torches that can be used in DC thermal plasma device, namely transferred arc, non-transferred arc and hollow electrode plasma. In the non-transferred plasma type, a plasma jet is generated by two electrodes and chemical reaction from the input gasses which ignites and produced downstream. DCTP nozzles have electrodes that are relatively small in diameter and limit the plasma jet produced thereby increasing the temperature and maximum velocity at the torch axis. The disadvantage of this method lies in the frequent erosion at the base of the fire which causes contamination by nozzle electrodes [11], [13]. The contamination may cause changes in nanomaterial production and ultimately its morphology such as increasing the size and increasing lattice parameters [14]–[16]. Cathodes are typically made of thoriated tungsten which can erode with oxide based gases in where zirconium and hafnium is used [17]. Electrode selection such as the use of graphite electrodes can also be applied, but it is considered costly for using the material [18].


Besides the torch nozzle material, the designs are also influential in the production of the nanomaterials. Jet conditions such as temperature, velocity and species fields are possible to be customized using this parameter. These factors can make the manufacturing process speed shorter and use these energies efficiently. Even with the loss of thermal energy in the electrode section due to radiation, convection and electron condensation of 35-50 percent [11].

2.2 Input Gasses


For the plasma to be produced it requires another variable to be taken into consideration, namely the input gas. This setting is done by controlling the input gasses to the DCTP generator with a specific flow rate. The gas itself is controlled by increasing the enthalpy and thermal conductivity of the plasma with specific gas choices [19]. Inherently, the specific enthalpy produced by the plasma generating apparatus depends on the type of input gas whether it is He, H₂, N₂, O₂, Ar or air according to the dissociation step. Changing its internal properties by mixing gases has become a common method for obtaining control of the enthalpy and thermal conductivity of plasma [6].

Oxidizing gas are not recommended with this type of torch, as previously mentioned it will damage the electrodes [13]. Argon is a gas that is chemically inert and easily ionized. This makes it suitable for use in synthesis requiring high purity. This is shown in the manufacture of sensitive devices such as semiconductors in research [20], [21]. In these studies, argon was used as a plasma gas but the resulting particles were of many types from rod, tetrapod and rod-like but differed due to reaction gasses.

The mixing of input gases such as Ar which has low thermal conductivity with gases such as H₂ which has high thermal conductivity can be seen in studies [19]. The enthalpies of various gases and their relationship to temperature can be adjusted by the mixing of other gases that will increase enthalpy and thermal conductivity [13], [22], [23]. The effects on the morphology of the nanoparticles can be seen in Figure 2 where different gas types [22] with the higher enthalpy gas of pure nitrogen has different morphologies compared to the N₂/Ar gas mix. Nitrogen plasma in this case has shown a more granular type showing agglomeration of ZnO structure due to the difference in plasma temperature and gas properties.

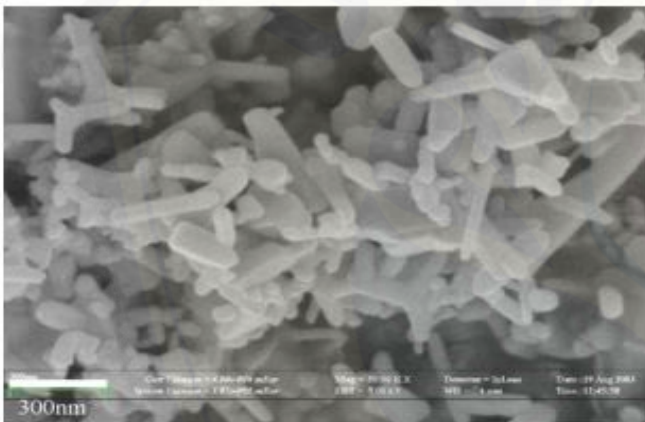

(a)

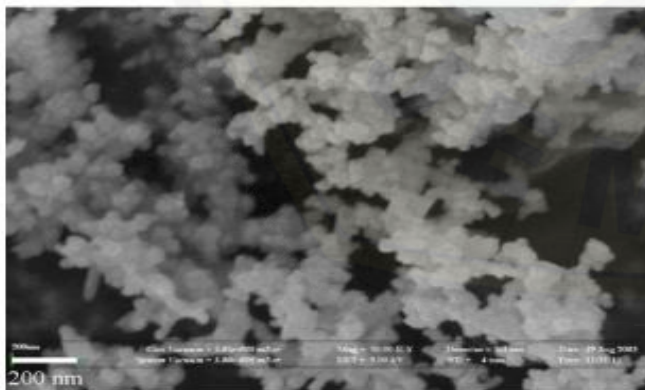

(b)

Figure 2. ZnO nanomaterial with input gas: (a) N₂/Ar and (b) nitrogen [22]

Compared to RF plasma jets, DC plasma jets are mostly turbulent due to the gasses which usually enhances mixing of

the injected precursor [24]. This indicator can also affect the morphology of the nanoparticles. Lin's study [25] has shown the residence time of the material in the plasma zone decreased with the plasma gas flow rate. Longer residence time would increase tetrapod shape formation during synthesis.

2.3 Power Output

Large plasma power output for generating the plasma can also be another aspect to consider for the synthesis results between variations. Length of the jet and the temperature of the plasma flame, both of which will change the operating conditions and increase the working area. A research [26] revealed that a higher plasma current will affect the temperature of the plasma flame produced, a higher plasma flame temperature will support the process of heating Zn particles in a plasma flame to form ZnO nanoparticles. However, choosing a plasma current that is too high is also not allowed. This is because the high temperature that will form can cause the formation of agglomerations.

Lin's research [25] also indicated change of nano-ZnO morphology due to the effect of DC power output 70 kW to 90 kW variations in plasma gas flow rates of 90 slm. The results of the study show that the 90 kW plasma current variation contains more tetrapod nanoparticles than the 70 kW variation. The selection of higher plasma power will form a higher flame temperature as well, it supports the process of forming ZnO nanoparticles. However, the balance between plasma power and precursor carrier rate must also be considered to obtain a good nanoparticle size. Because when the carrier rate of the powder is low or less able to push and break the particles in the plasma flame, agglomeration will occur [27].

3. PRECURSOR AND REACTION GASES

Research [28] on the synthesis of nanoparticles using DC TP Jet by varying the precursor gas carrier has shown some indication of the effects on nanomaterial morphology. Power used was of 6 kW and precursor carrier gas flow rate 15 lpm and 20 lpm. The plasma flame used an input power of 6 kW and a powder carrier gas flow rate of 15 lpm to produce a flame temperature of 6960 K. However, the flame temperature decreased to 6684 K when the injected powder carrier gas flow rate was changed to 20 lpm. The decrease in flame temperature affects the size of the resulting particles.

The method of filling particles as precursors can be a factor that has a great influence on the ability to melt particles in the plasma. As the rate of incorporation of particulates into the discharge region increases, the energy transferred from the plasma to the particles will result in a decrease in the plasma temperature and consequently the heating rate of the particles. This has been proven in several studies of nano ZnO such as [20], [21] and other materials such as nickel powder [27] and alumina [29] among others.

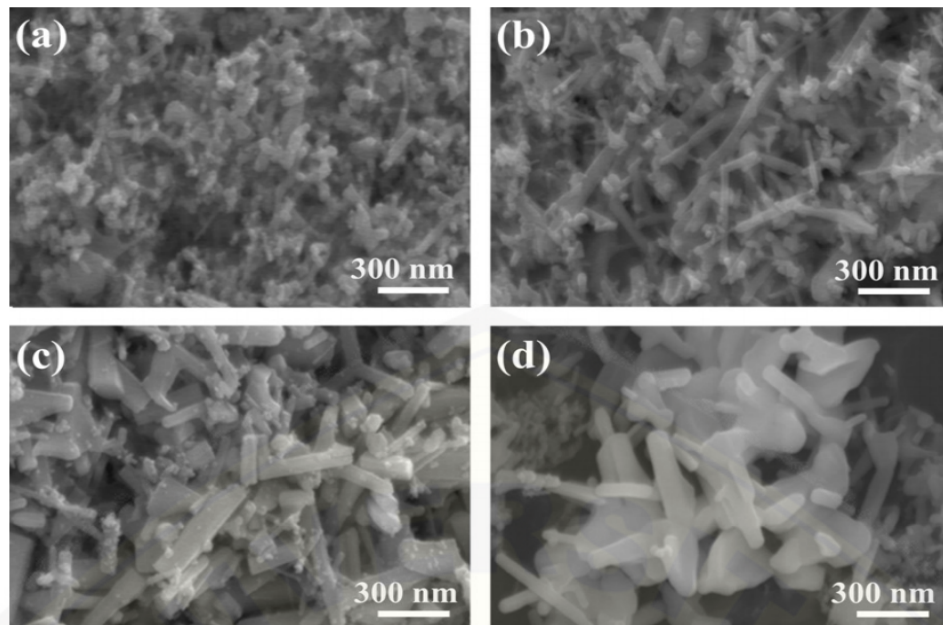


Figure 3. SEM image of ZnO nanoparticle synthesis result with gas rate variation; (a) O₂ 1 l/min, (b) O₂ 3 l/min, (c) O₂ 5 l/min, (d) O₂ 7 l/min [21]

It is shown in Lee’s research [21], in terms of morphology and crystal size of ZnO particles, particles will be smaller when the reaction gas flow is lower. As the reaction gas flow rate increases, it is likely that the products will grow and become rods and the size of the clustered particles will also become larger as seen Figure 3. As the reaction gas flow rate increases, the oxygen source becomes more abundant and leads to the increase of regions for particle growth.

This phenomenon should be understood however, that the growth would only work for oxide-based gasses for carrier and reaction gasses, as it is the gas that interacts with the precursors. The concept can be seen in [30] where Ar, CO₂, and O₂ were used as carrier gases to investigate the effect. The XRD pattern is shown in Figure 4 where ZnO synthesized using carrier gas Ar (3) and CO₂ (4) had similar patterns. O₂ (5) gas had less Zn peak which indicated more efficient oxidation.

4. CONCLUSION

Many studies have successfully synthesized nano-ZnO particles with DCTP which had various characteristics. The method has shown that it is one the simplest ways in producing nanomaterials with various outcomes depending on the parameters installed. The plasma torch itself has factors such as torch nozzles, electrode type, size and materials which can change the plasma jet, resulting in plasma jet sizes or temperature that are undesirable if not controlled properly. This also includes torch input gasses that may affect the particles due to their inherent properties and can change particles morphology. From the precursor input point of view, the precursor and carrier gasses may change the output due to its reactions with the plasma jets. Different variables in this input would result in different outcome of ZnO morphology. Therefore, detailed planning of production parameters of DC thermal plasma is crucial for a desired ZnO nanomaterial morphology.

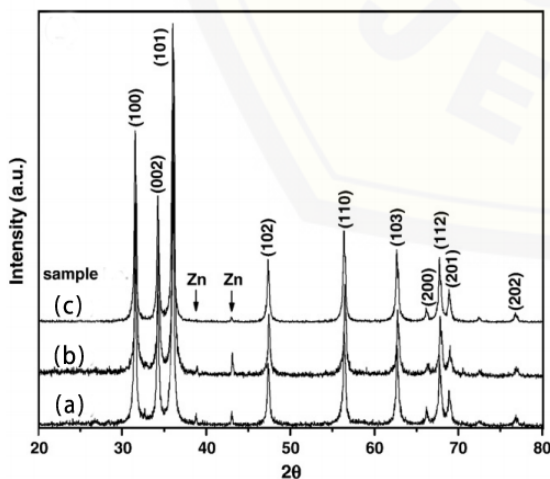


Figure 4. ZnO nanomaterial XRD with variety of reaction gas: (a) Ar; (b) CO₂ and (c) O₂ [30]

REFERENCES

1. M. Abdullah, Y. Virgus, Nirmin, and Khairurrijal, **Review: Sintesis Nanomaterial**, *J. Nanosains Nanoteknologi*, vol. 1, no. 2, pp. 33–57, 2008.
2. A. K. Bharathi, **Analysis of the thermal properties of zinc oxide using the ReaxFF Reactive Force Field**, M.S. thesis, Dept. Mech. Eng., Pennsylvania Univ no. December, 2010.
3. Z. L. Wang, **Zinc oxide nanostructures: Growth, properties and applications**, *J. Phys. Condens. Matter*, vol. 16, no. 25, 2004.
4. Ramsden, *Nanotechnology: an introduction*, vol. 49, no. 11. Elsevier, 2012.

5. H. Morkoç and Ü. Özgür, **Zinc Oxide: Fundamentals, Materials and Device Technology**. Wiley, 2009.
6. A. Moezzi, A. M. McDonagh, and M. B. Cortie, **Zinc oxide particles: Synthesis, properties and applications**, *Chem. Eng. J.*, vol. 185–186, pp. 1–22, 2012.
7. M. F. S. Hermandy, M. Z. M. Yusof, M. S. Yahya, and M. R. Awal, **The Green Synthesis of Nanoparticle Zinc Oxide (ZnO) Using Aloe Vera Leaf Extract: Structural and Optical Characterization Reviews**, *Int. J. Emerg. Trends Eng. Res.*, vol. 8, no. 10, pp. 6896–6902, 2020.
8. A. Moezzi, A. M. McDonagh, and M. B. Cortie, **Zinc oxide particles: Synthesis, properties and applications**, *Chem. Eng. J.*, vol. 185–186, pp. 1–22, 2012.
9. W. Lee, S. Choi, S. M. Oh, and D. W. Park, **Preparation of spherical hollow alumina particles by thermal plasma**, *Thin Solid Films*, vol. 529, pp. 394–397, 2013.
10. M. Shigeta and A. B. Murphy, **Thermal plasmas for nanofabrication**, *J. Phys. D. Appl. Phys.*, vol. 44, no. 17, 2011.
11. K. S. Kim and T. H. Kim, **Nanofabrication by thermal plasma jets: From nanoparticles to low-dimensional nanomaterials**, *J. Appl. Phys.*, vol. 125, no. 7, 2019.
12. E. Gomez, D. A. Rani, C. R. Cheeseman, D. Deegan, M. Wise, and A. R. Boccaccini, **Thermal plasma technology for the treatment of wastes: A critical review**, *J. Hazard. Mater.*, vol. 161, no. 2–3, pp. 614–626, 2009.
13. M. I. Boulos, **Thermal Plasma Processing**, *IEEE Trans. Plasma Sci.*, vol. 19, no. 6, pp. 1078–1089, 1991.
14. M. Nirmala and A. Anukaliani, **Characterization of undoped and Co doped ZnO nanoparticles synthesized by DC thermal plasma method**, *Phys. B Condens. Matter*, vol. 406, no. 4, pp. 911–915, 2011.
15. M. Nirmala *et al.*, **Photocatalytic Activity of ZnO Nanopowders Synthesized by DC Thermal Plasma**, *African J. Basic Appl. Sci.*, vol. 2, no. 6, pp. 161–166, 2010.
16. M. G. Nair, M. Nirmala, K. Rekha, and A. Anukaliani, **Structural, optical, photo catalytic and antibacterial activity of ZnO and Co doped ZnO nanoparticles**, *Mater. Lett.*, vol. 65, no. 12, pp. 1797–1800, 2011.
17. J. Peters, F. Yin, C. F. M. Borges, J. Heberlein, and C. Hackett, **Erosion mechanisms of hafnium cathodes at high current**, *J. Phys. D. Appl. Phys.*, vol. 38, no. 11, pp. 1781–1794, 2005.
18. S. Junus, Sumarji, Haidzar, and R. Sidartawan, **The effect of copper electrode and HSS type electrode on DC thermal plasma metode on the characteristics of the nanoparticle Al₂O₃**, *ARPJ. Eng. Appl. Sci.*, vol. 14, no. 1, pp. 24–28, 2019
19. J. Guo, **Induction Plasma Synthesis of Nanomaterials**, 2016.
20. S. J. Kim and D. W. Park, **Preparation of ZnO nanopowders by thermal plasma and characterization of photo-catalytic property**, *Appl. Surf. Sci.*, vol. 255, no. 10, pp. 5363–5367, 2009.
21. S. J. Lee, J. Choi, and D. W. Park, **Synthesis of ZnO nanopowders by DC thermal plasma for dye-sensitized solar cells**, *Mater. Sci. Eng. B Solid-State Mater. Adv. Technol.*, vol. 178, no. 8, pp. 489–495, 2013.
22. H. F. Lin, S. C. Liao, and S. W. Hung, **The dc thermal plasma synthesis of ZnO nanoparticles for visible-light photocatalyst**, *J. Photochem. Photobiol. A Chem.*, vol. 174, no. 1, pp. 82–87, 2005.
23. C. H. Lee *et al.*, **The influence of tetrapod-like ZnO morphology and electrolytes on energy conversion efficiency of dye-sensitized solar cells**, *Electrochim. Acta*, vol. 55, no. 28, pp. 8422–8429, 2010.
24. M. Shigeta, **Turbulence modelling of thermal plasma flows**, *J. Phys. D. Appl. Phys.*, vol. 49, no. 49, 2016.
25. H. F. Lin, S. C. Liao, and C. T. Hu, **A new approach to synthesize ZnO tetrapod-like nanoparticles with DC thermal plasma technique**, *J. Cryst. Growth*, vol. 311, no. 5, pp. 1378–1384, 2009.
26. H. Seifi, T. Gholami, S. Seifi, S. M. Ghoreishi, and M. Salavati-Niasari, **A review on current trends in thermal analysis and hyphenated techniques in the investigation of physical, mechanical and chemical properties of nanomaterials**, *J. Anal. Appl. Pyrolysis*, vol. 149, 2020.
27. G. Shanmugavelayutham, V. Selvarajan, P. V. A. Padmanabhan, K. P. Sreekumar, and N. K. Joshi, **Effect of powder loading on the excitation temperature of a plasma jet in DC thermal plasma spray torch**, *Curr. Appl. Phys.*, vol. 7, no. 2, pp. 186–192, 2007.
28. S. Kumar and V. Selvarajan, **Plasma spheroidization of iron powders in a non-transferred DC thermal plasma jet**, *Mater. Charact.*, vol. 59, no. 6, pp. 781–785, 2008.
29. H. A. Rochman, A. G. Dirgantara, S. Junus, I. Sholahuddin, and A. Z. Muttaqin, **Pengaruh Laju Prekursor Serbuk Aluminium Terhadap Bentuk Morfologi Nanopartikel Alumina Dengan Metode Thermal Plasma**, *Rotor*, vol. 10, no. 1, p. 17, 2017.
30. J. S. Park and D. W. Park, **Synthesis of zinc oxide nano-particles using carbon dioxide by DC plasma jet**, *Surf. Coatings Technol.*, vol. 205, no. SUPPL. 1, 2010.