

ISBN: 973-93-80877-43-2

ISSN: 0975-8887

Foundation of Computer Science

# International Journal of Computer Applications

August 2013

**Vol 76 - Number 13**  
[www.ijcaonline.org](http://www.ijcaonline.org)

## Table of Contents

Sr. No	Topic
1.	Scope of the Journal
2.	The Model
3.	The Advisory and Editorial Board
4.	Papers

First Published in the United States of America.

Copyright © 2012

Foundation of Computer Science Inc.

Originated and printed by Foundation of Computer Science Press, New York, USA

## **Scope of the Journal**

---

International Journal of Computer Applications (IJCA) creates a place for publication of papers which covers the frontier issues in Computer Science and Engineering and their applications which will define new wave of breakthroughs. The journal is an initiative to identify the efforts of the scientific community worldwide towards inventing new-age technologies. Our mission, as part of the research community is to bring the highest quality research to the widest possible audience. International Journal of Computer Applications is a global effort to consolidate dispersed knowledge and aggregate them in a search-able and index-able form.

The perspectives presented in the journal range from big picture analysis which address global and universal concerns, to detailed case studies which speak of localized applications of the principles and practices of computational algorithms. The journal is relevant for academics in computer science, applied sciences, the professions and education, research students, public administrators in local and state government, representatives of the private sector, trainers and industry consultants.

### **Indexing**

International Journal of Computer Applications (IJCA) maintains high quality indexing services such as Google Scholar, CiteSeer, UlrichsWeb, DOAJ (Directory of Open Access Journals) and Scientific Commons Index, University of St. Gallen, Switzerland. The articles are also indexed with SAO/NASA ADS Physics Abstract Service supported by Harvard University and NASA, Informatics and ProQuest CSA Technology Research Database. IJCA is constantly in progress towards expanding its contents worldwide for the betterment of the scientific, research and academic communities.

### **Topics**

International Journal of Computer Applications (IJCA) supports a wide range of topics dealing in computer science applications as: Embedded Systems, Pattern Recognition, Signal Processing, Robotics and Micro-Robotics, Theoretical Informatics, Quantum Computing, Software Testing, Computer Vision, Digital Systems, Pervasive Computing etc.

---

## **The Model**

---

### **Open Review**

International Journal of Computer Applications approach to peer review is open and inclusive, at the same time as it is based on the most rigorous and merit-based 'blind' peer-review processes. Our referee processes are criterion-referenced and referees selected on the basis of subject matter and disciplinary expertise. Ranking is based on clearly articulated criteria: The result is a refereeing process that is scrupulously fair in its assessments at the same time as offering a carefully structured and constructive contribution to the shape of the published paper.

### **Intellectual Excellence**

The result is a publishing process which is without prejudice to institutional affiliation, stage in career, national origins or disciplinary perspective. If the paper is excellent, and has been systematically and independently assessed as such, it will be published. This is why International Journal of Computer Applications has so much exciting new material, much of it originating from well known research institutions but also a considerable amount of brilliantly insightful and innovative material from academics in lesser known institutions in the developing world, emerging researchers, people working in hard-to-classify interdisciplinary spaces and researchers in liberal arts colleges and teaching universities.

---



## The Advisory and Editorial Board

The current editorial and Advisory committee of the International Journal of Computer Applications (IJCA) includes members of research center heads, faculty deans, department heads, professors, research scientists, experienced software development directors and engineers.

Dr. T. T. Al Shemmeri, Staffordshire University, UK	Bhalaji N, Vels University
Dr. A.K.Banerjee, NIT, Trichy	Dr. Pabitra Mohan Khilar, NIT Rourkela
Amos Omondi, Teesside University	Dr. Anil Upadhyay, UPTU
Dr Amr Ahmed, University of Lincoln	Cheng Luo, Coppin State University
Dr. Keith Leonard Mannoek, University of London	Harminder S. Bindra, PTU
Dr. Alexandra I. Cristea, University of Warwick	Santosh K. Pandey, The Institute of CA of India
Dr. V. K. Anand, Punjab University	Dr. S. Abdul Khader Jilani, University of Tabuk
Dr. Rakesh Mishra, University of Huddersfield	Kamaljit I. Lakhtaria, Saurashtra University
Dr. S.Karthik, Anna University	Dr. Anirban Kundu, West Bengal University of Technology
Amol D. Potgantwar, University of Pune	Dr Pramod B Patil, RTM Nagpur University
Dr. Neeraj Kumar Nehra, SMVD University	Dr. Debasis Giri, WBUT
Dr. Rajesh Kumar, National University of Singapore	Deo Prakash, Shri Mata Vaishno Devi University
Dr. Sabnam Sengupta, WBUT	Rakesh Lingappa, VTU
D. Jude Hemanth, Karunya University	P. Vasant, University Teknologi Petornas
Dr. A.Govardhan, JNTU	Yuanfeng Jin, YanBian University
Dr. R. Ponnusamy, Vinayaga Missions University	Rajesh K Shukla, RGPV
Dr. Yogeshwar Kosta, CHARUSAT	Dr.S.Radha Rammohan, D.G. of Technological Education
T.N.Shankar, JNTU	Prof. Hari Mohan Pandey, NMIMS University
Dayashankar Singh, UPTU	Prof. Kanchan Sharma, GGS Indraprastha Vishwavidyalaya
Bidyadhar Subudhi, NIT, Rourkela	Dr. S. Poornachandra, Anna University
Dr. Nitin S. Choubey, NMIMS	Dr. R. Uma Rani, University of Madras
Rongrong Ji, Harbin Institute of Technology, China	Dr. V.B. Singh, University of Delhi
Anand Kumar, VTU	Hemant Kumar Mahala, RGPV
Prof. S K Nanda, BPUT	Prof. Debnath Bhattacharyya, Hannam University
Dr. A.K. Sharma, Uttar Pradesh Technical University	Dr A.S.Prasad, Andhra University
Rajeshree D. Raut, RTM, Nagpur University	Deepak Joshi, Hannam University
Dr. Vijay H. Mankar, Nagpur University	Dr. P K Singh, U P Technical University
Atul Sajjanhar, Deakin University	RK Tiwari, U P Technical University
Navneet Tiwari, RGPV	Dr. Himanshu Aggarwal, Punjabi University
Ashraf Bany Mohammed, Petra University	Dr. K.D. Verma, S.V. College of PG Studies & Research
Totok R Biyanto, Sepuluh Nopember	R.Amirtharajan, SASTRA University
Sheti Mahendra A, Dr. B A Marathwada University	Md. Rajibul Islam, University Technology Malaysia
Koushik Majumder, WBUT	S.Hariharan, B.S. Abdur Rahman University
Dr.R.Geetharamani, Anna University	Dr.S.Sasikumar, HCET
Rupali Bhardwaj, UPTU	Dakshina Ranjan Kisku, WBUT
Gaurav Kumar, Punjab Technical University	A.K.Verma, TERI
Prof. B.Nagarajan, Anna University	Vikas Singla, PTU
Dr H N Suma, VTU	Dr. Udai Shanker, UPTU
Anu Suneja, Maharshi Markandeshwar University	Prof. Rachit Garg, GNDU
Aung Kyaw Oo, DSA, Myanmar	Dr Lefteris Gortzis, University of Patras, Greece.
Suhas J Manangi, Microsoft	Mahdi Jampour, Kerman Institute of Higher Education
Prof. D S Suresh, Pune University	Prof.M.V.Deshpande, University of Mumbai

Dr. Vipin Kakkar, SMVD University	Dr. Ian Wells, Swansea Metropolitan University, UK
Dr M Ayoub Khan, Ministry of Communications and IT, Govt. of India	Yongguo Liu, University of Electronic Science and Technology of China
Prof. Surendra Rahamatkar, VIT	Prof. Shishir K. Shandilya, RGPV
M.Azath, Anna University	Liladhar R Rewatkar, RTM Nagpur University
R. Jagadeesh K, Anna University	Amit Rathi, Jaypee University
Dr. Dilip Mali, Mekelle University, Ethiopia.	Dr. Paresh Virparia, Sardar Patel University
Morteza S. Kamarposhti , Islamic Azad University of Firoozkuh, Iran	Dr. D. Gunaseelan Directorate of Technological Education, Oman
Dr. M. Azzouzi, ZA University of Djelfa, Algeria.	Dr. Dhananjay Kumar, Anna University
Jayant shukla, RGPV	Prof. Yuvaraju B N, VTU
Dr. Ananya Kanjilal, WBUT	Daminni Grover, IILM Institute for Higher Education
Vishal Gour, Govt. Engineering College	Monit Kapoor, M.M University
Dr. Binod Kumar, ISTAR	Amit Kumar, Nanjing Forestry University, China.
Dr.Mallikarjun Hangarge, Gulbarga University	Gursharanjeet Singh, LPU
Dr. R.Muthuraj, PSNACET	Mohd.Muqeem, Integral University
Dr. Chitra. A. Dhawale, Symbiosis Institute of Computer Studies and Research	Dr.Abdul Jalil M. Khalaf, University of Kufa, IRAQ.
Dr. Rizwan Beg, UPTU	R.Indra Gandhi, Anna University
V.B Kirubanand, Bharathiar University	Mohammad Ghulam Ali, IIT, Kharagpur
Dr. D.I. George A., Jamal Mohamed College	Kunjai B.Mankad, ISTAR
Raman Kumar, PTU	Lei Wu, University of Houston – Clear Lake, Texas.
G. Appasami , Anna University	S.Vijayalakshmi, VIT University
Dr. Gurpreet Singh Josan, PTU	Dr. Seema Shah, IIIT, Allahabad
Dr. Wichian Sittiprapaporn, Mahasarakham University, Thailand.	Chakresh Kumar, MRI University, India
Dr. Vishal Goyal, Punjabi University, India	Dr. A.V.Senthil Kumar, Bharathiar University, India
R.C.Tripathi, IIIT-Allahabad, India	Prof. R.K. Narayan , B.I.T. Mesra, India



## PAPERS

---

A Novel Non-local Means based Technique for Simultaneous Denoising and Fusion <i>Authors : Hemalata V. Bhujle</i>	1-7
An Impact of Biometric System Applications Services on Biometric Service Market <i>Authors : Manoj Diwakar, Pawan Kumar Patel, Kunal Gupta, Amrendra Tripathi</i>	8-13
Discovering Maximal Frequent Itemset using Association Array and Depth First Search Procedure with Effective Pruning Mechanisms <i>Authors : K. Sumathi, S. Kannan, K. Nagarajan</i>	14-18
Efficient Approach for Rapid Sample Protocol in Wireless Scenario <i>Authors : Madhulika Malviya, Jitendra Dangra, M. K Rawat</i>	19-23
Programmer Protocol for Identification and Defense of Latest Web Application Security Threats using Open Source Tools <i>Authors : Devang Sharma</i>	24-32
Non-Contact Measurement of Blood Glucose based on Artificial Neural Network <i>Authors : Bagas Satya Dian Nugraha, Faghanie Sugarizka</i>	33-36
Modeling of Router-based Request Redirection for Content Distribution Network <i>Authors : Erwin Harahap, Janaka Wijekoon, Rajitha Tennekoon, Fumito Yamaguchi, Shinichi Ishida, Hiroaki Nishi</i>	37-46
A Survey on Hash based A-priori Algorithm for Web Log Analysis <i>Authors : Santosh Shakya, Anju Singh, Divakar Singh</i>	47-50

# Non-Contact Measurement of Blood Glucose based on Artificial Neural Network

Bagas Satya Dian Nugraha<sup>1</sup>, Faghanie Sugarizka<sup>2</sup>,

Fatimah Ken Pratiwi<sup>3</sup>, Risqi Mahardhika<sup>4</sup>, Bambang Sujanarko<sup>5</sup>

<sup>1,5</sup>Jurusan Teknik Elektro <sup>2</sup>Program Studi Sistem Informasi <sup>3,4</sup>Fakultas Kedokteran  
UNIVERSITAS JEMBER

## ABSTRACT

Diabetes mellitus is a disease caused by metabolic disorder that result a lack of insulin in human body. Deficiency of the insulin hormone causes abnormal blood sugar level fluctuation. These conditions should be treated appropriately to prevent the occurrence acute metabolic disorder and chronic complication, so an appropriate treatment can be done by medical personal. This paper develops a non-contact device to measure blood sugar level based on Artificial Neural Network (ANN). ANN in this device convert temperature difference between tragus and antihelix to an index of blood glucose. Tragus and antihelix are the name of two sections of human ear. Using infra red sensor that called thermopile, temperature of these section is measure. So there is no contact between human body and the device. Weight and bias of ANN determine by Back Propagation trained using data from conventional measurement. Experiment result using Matlab Simulink and Peripheral Component Interconnect (PCI) interfacing showed that the device can measured blood glucose and can be used for measurement easier, faster and less intimidating as occurs in conventional measurements.

## Keywords

blood glucose level, non-contact measurement, tragus and antihelix, artificial neural network.

## 1. INTRODUCTION

Diabetes (diabetes mellitus) is a group of metabolic syndrome caused by interactions of genetic and environmental factors. Because defects of insulin secretion, insulin action or both, carbohydrates, protein, fat, water and electrolyte metabolism disorders are occurred. Its main common characteristic in clinic is chronic (long term) hyperglycemia [1,2]. Dysfunction and failure of various organs are the effects of diabetes mellitus long-term damage. It may present with characteristic symptoms such as thirst, polyuria, blurring of vision, and weight loss. In its most severe forms, ketoacidosis may develop and lead to stupor, coma and, in absence of effective treatment, death [2].

Treatment of hyperglycemic patient is really necessary to do, to eliminate symptoms, to maintain a normal quality of life and work capability, to prevent the occurrence of acute metabolic disorder, and to prevent and delay the occurrence and development of chronic complications. Therefore, measurement of blood sugar levels regularly and periodically is a way to keep sugar levels in balance [3]. Most of methods for blood glucose measurement are invasive. Sample blood from patients is taken and the glucose level is measured, typically by glucose oxidase (GOx) method [2]. Venous whole blood, plasma or serum glucose is tested in hospitals. To maintain the glucose at a desired level, the blood glucose

has to be tested several times per day, including at least before and after the three meals and before bed.

All of these methods accurately obtain a blood glucose level, but there are problems and limitations. First, it is inconvenience and very painful to take blood samples multiple times per day. Second, it is costly to use glucose oxidase reagents or test strips either in hospital or at home, which presents a significant financial burden to patients [2]. In addition, self-testing at home may lead to blood contamination and bacterial infection.

Therefore development of a non-invasive type of blood glucose monitoring technologies and devices has been a long-term goal of many research institutions and companies [3]. The main objective of this research is to produce a measurement of blood sugar levels quickly and cheaply. Several non-invasive invention methods are known as reverse iontophoresis and another technique involves transcutaneous harvesting of interstitial fluid from the skin using ultra fine needles, micro-laser drilling, ultrasonic, and disruption chemicals [1- 3]. However, the slow response and the attached sensor to the patient become a weakness in blood sugar level measurement.

In this paper will develop a non-contact method that able to measure blood sugar level without touching the patient. The system based on temperature differences between two points on the ear (tragus and anti-helix) [3] that measured by a thermopile. This method supported by artificial neural network (ANN) computing system that has high accuracy and precision [4-6].

## 2. SYSTEM DESIGN

Fig. 1 show the system block diagram of device that used to measure blood glucose in tis research. Basic prinsip of this system is as follows.

Temperature of tragus and antihelix alternately measure by thermopile. Each scale of these temperature than convert to celcius degree using ANN cicuit. This ANN have two inputs, output of amplifier that amplify thermopile signal and output of amplifier that amplify thermistor signal as compensate environment ambient temperature. These signal enter into computer by PCI interfacing. Weight and Bias of this ANN trained using data that determine by conventional method in the hospital.

After tragus and antihelix temperature obtained, these temperature then convert to blood glucose level using ANN again. Similar as ANN in the previous, this ANN also trained using data that determine by conventional method in the hospital. Finnaly, the blood glucose level displayed on the screen using Matlab GUI.



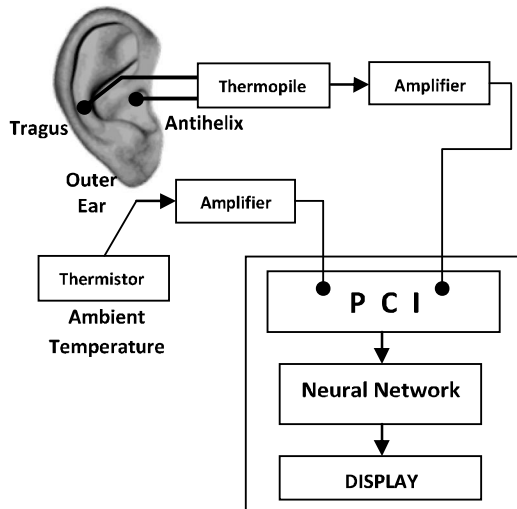


Figure 1. System block diagram

## 2.1 Blood Glucose and Tragus-Antihelix Temperature Relation

Based on the article Larry W. Ishler [3] who explains that the temperature difference between the two regions in the ear (tragus-antihelix) believed to affect changes in blood glucose levels. It can be determined that if the temperature differential decreases, then the blood glucose has increased 1 mg/dl per approximately  $0.024^{\circ}\text{C}$ , while if the temperature differential increases, the blood glucose has decreased 1 mg/dl per approximately  $0.024^{\circ}\text{C}$ .

## 2.2 Thermopile and Amplification Circuit

Based on the thermoelectric effect, the thermopile can be used as a heat sensor to measure thermal radiation. A thermopile is made of thermocouple junction pairs connected electrically in series [7]. A thermocouple consists of two dissimilar conductors in contact, which can produce a voltage when heated. The voltage produced is dependent on the difference of temperature of the junction to other parts of the circuit. Thermocouples are a widely used type of temperature sensor for measurement and control and can also be used to convert a temperature gradient into electricity [8].

In this research, thermopile used as a temperature detector of tragus and antihelix. In principle, the thermopile has the characteristic of any increase temperature will cause voltage rise. However, the voltage on the body or ear temperature measurement has very small differences that needed amplifying circuit, so that the voltages must amplify.

This amplification circuit consists of two operational amplifier (op amp) [9]. The two op amp in this circuit used as a non-inverting amplifier. Fig. 2 shows the circuit diagram of a non-inverting amplifier. The input voltage  $V_{in}$  is applied to the non-inverting op amp input. A voltage divider consisting of resistors  $R_F$  and  $R_i$  connects from the output node to the inverting input. The circuit is called a non-inverting amplifier because its voltage gain is positive. This means that if the input voltage is increasing or going positive, the output voltage will also be increasing going positive.

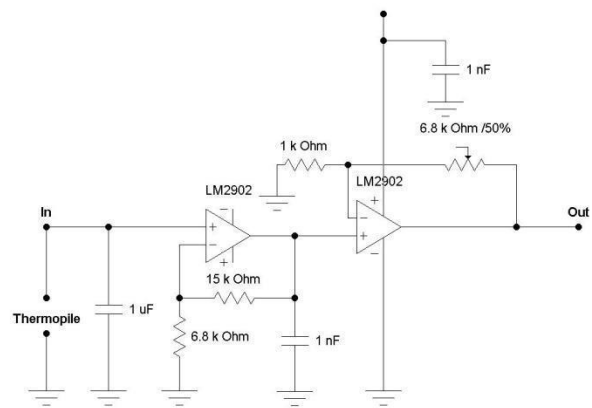


Figure 2. Thermopile Amplifier

## 2.3 Thermistor and Amplification Circuit

A thermistor is a special type of semiconductor that varies in resistance in a predictable way as temperature is changed [8,10]. Thermistors can be classified into two types: If the resistance increases with increasing temperature, the device is called a positive temperature coefficient (PTC). If the resistance decreases with increasing temperature, the device is called a negative temperature coefficient (NTC) thermistor. In this case we use the type of NTC thermistor [10].

Thermistor is used for the compensation of an environment temperature. According to the variation of an environment temperature, the output of thermopile detector is also varying. It is therefore need to compensate this temperature performance of thermopile detector. The thermopile detectors are using a thermistor for the compensation of an environment temperature. In this invention, the resistant value of thermistor is converted to voltage value to make it easier to compensate with the thermopile output. Fig. 3 shows the amplifier circuit of thermistor.

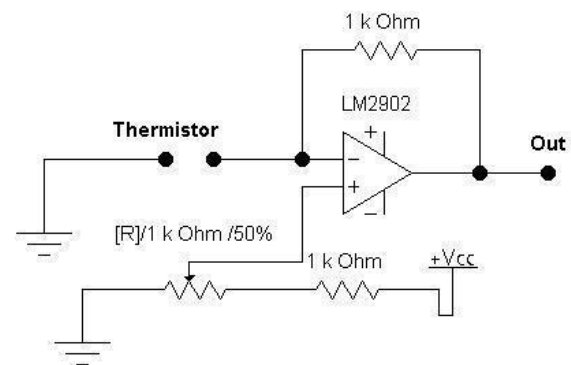


Figure 3. Thermistor Amplifier

## 2.4 PCI, Interfacing Program and Real-Time Works Matlab Simulink

PCI is a local computer bus for attaching hardware devices in a computer. The PCI bus supports the functions found on a processor bus, but in a standardized format that is independent of any particular processor. Devices connected to the bus appear to the processor to be connected directly to the

processor bus, and are assigned addresses in the processor's address space [11].

PCI Express (Peripheral Component Interconnect Express), officially abbreviated as PCIe, is a high-speed serial computer expansion bus standard designed to replace the older PCI, PCI-X, and AGP bus standards. PCIe has numerous improvements over the aforementioned bus standards, including higher maximum system bus throughput, lower I/O pin count and smaller physical footprint, better performance-scaling for bus devices, a more detailed error detection and reporting mechanism (Advanced Error Reporting (AER)<sup>[1]</sup>), and native hot-plug functionality. More recent revisions of the PCIe standard support hardware I/O virtualization.

PCI Express is used as the data communication and interface between the sensor and the computer device. The result of thermopile and thermistor is analog which then converted into digital data. The conversion of analog to digital data facilitates the processing data on computer, so that the application of artificial neural network (ANN) will also be easier.

MATLAB (matrix laboratory) is a numerical computing environment and fourth-generation programming language. Developed by MathWorks, MATLAB allows matrix manipulations, plotting of functions and data, implementation of algorithms, creation of user interfaces, and interfacing with programs written in other languages, including C, C++, Java, and Fortran [12].

Simulink is a software package for modeling, simulating, and analyzing dynamical systems. It supports linear and nonlinear systems, modeled in continuous time, sampled time, or a hybrid of the two. Systems can also be multirate.

## 2.5 Neural Network Design

Artificial Neural Network (ANN) is an interconnected group of natural or artificial neurons that uses a mathematical or computational model for information processing based on a connectionistic approach to computation [4-6]. In most cases an ANN is an adaptive system that changes its structure based on external or internal information that flows through the network. Artificial Neural Network is a non-linear data processing system which has high accuracy and precision. It is possible to provide accurate and precise blood glucose measurement. In this case, artificial neural network (ANN) used as a processing data system from temperature result that detected by thermopile sensor and thermistor.

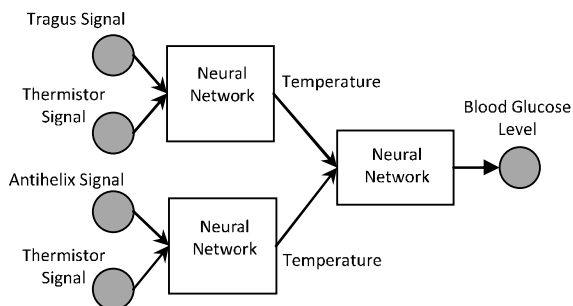


Figure 2. Neural Network Structure

The construction of non-contact blood glucose measurement involve two steps of neural network computation. First step is the processing of thermopile and thermistor measurement which converted into degrees centigrade. This is necessary because the result of measurement sensors is formed in voltage (volts), so that needs to change into temperature unit

to facilitate further measurement. The second step is the acquisition value of blood sugar levels by measuring the ear temperature at tragus and antihelix region obtained from the first neural network process using these sensors.

The first neural network structure is formed by the training using the data that obtained from conventional temperature measurement, amplified thermopile voltage, and amplified thermistor voltage. Especially on thermopile, sensor will divide by two times measurement, i.e. tragus region measurement and antihelix region measurement. The training result formed in tragus and antihelix temperature will be the data for the next blood glucose neural network training.

The tragus and antihelix temperature that have been obtained from the first neural network training is the data for the second neural network training that will result blood glucose level value. This blood glucose level value is established by the training process using tragus and antihelix temperature and blood glucose level that are conventionally taken in hospital.

## 3. RESULT AND DISCUSSION

Within 7 patients of Soebandi Hospital at Jember Indonesia, the result of glucose measurement using Gox and the system show at Table 1.

Table 1. Device Measurement Result

Object	Tragus Temp. (°C)	Antihelix Temp. (°C)	Blood Glucose with GOx (mg/dL)	Blood Glucose with NN (mg/dL)
I	33.4	31.2	100	107
II	33.1	29.3	125	121
III	33.5	30.2	115	112
IV	34.3	31.9	120	110
V	32.4	30.9	160	163
VI	35.9	33.8	155	160
VII	32.1	30.7	170	166

Based on table 1, comparison between measurement using neural network device with conventional measurement have a small difference. The data shows error percentage of 0.98%-1.07%. With this value of the error, we can obtained statement that blood glucose measurement using non-contact system with artificial neural network has given good and accurate result.

## 4. CONCLUSION

Non-contact measurement of Glucose based on Artificial Intelegant can build and have error percentage of 0.98%-1.07%. This method can prevent painful of patient and can avoid blood contamination and bacterial infection.

## 5. ACKNOWLEDGMENT

This work was supported by *Program Kreativitas Mahasiswa (PKM), Direktorat Jendral Pendidikan Tinggi, Departemen Pendidikan dan Kebudayaan Republik Indonesia.*

## 6. REFERENCES

- [1] Definition and diagnosis of diabetes mellitus and intermediate hyperglycemia: report of a WHO/IDF consultation. Geneva: World Health Organization. 2006.
- [2] Julio Raba and Horacio A. Mottola (1995). Glucose Oxidase as an Analytical Reagent. *Critical Reviews in Analytical Chemistry*.
- [3] Larry W. Ishler and Erie, USA Patent. 2003. Non-Invasive Blood Glucose Monitoring System.
- [4] Ganesan, N. Application of Neural Networks in Diagnosing Cancer Disease Using Demographic Data (PDF). *International Journal of Computer Applications*. Retrieved 2013-7-15.
- [5] Bottaci, Leonardo. Artificial Neural Networks Applied to Outcome Prediction for Colorectal Cancer Patients in Separate Institutions (PDF). *The Lancet*. Retrieved 2013-7-15.
- [6] <http://uhaweb.hartford.edu/compsci/neural-networks-Learning.html>. Retrieved 2013-7-16.
- [7] GE Measurement and Control. Application Note: Thermopile IR Sensor Applications (PDF). 2012.
- [8] Practical Temperature Measurements (PDF). Agilent Application Note. Agilent Semiconductor. Retrieved 2013-7-16.
- [9] Texas Instruments. Understanding Basic Analog: Ideal Op Amps (Application Report SLAA068A)(PDF). 2000. Retrieved 2013-7-18.
- [10] Thermistors & Thermocouples: Matching the Tool to the Task in Thermal Validation (PDF). *Journal of Validation Technology*. Retrieved 2013-7-15.
- [11] <http://www.webopedia.com/TERM/P/PCI.html>. Retrieved 2013-7-17.
- [12] Simulink: Dynamic System Simulation for Matlab (PDF). [http://www.mathworks.com/products/matlab/?s\\_cid=wiki\\_matlab\\_15](http://www.mathworks.com/products/matlab/?s_cid=wiki_matlab_15). Retrieved 2013-7-16.



## Information for Authors

**Review Process:** A critical objective of International Journal of Computer Application's mission statement is to provide highly relevant technical information. International Journal of Computer Applications has implemented a rigorous peer review process to ensure the high quality of its technical material. Every paper is reviewed by at least two referees who are competent and have experience in the area of the subject matter of the paper. Referees are formal reviewers whose comments and opinions will form the basis upon which the Editor will decide whether or not to publish the paper, and with what changes. The referees are protected from personal interactions with the author by withholding their names. The Editor's decision is always based on all the reviews received, but mixed reviews present the need for the exercise of editorial judgment. Thus, the final decision for acceptance or rejection lies with the Editor. The review process shall ensure that all authors have equal opportunity for publication of their papers.

### Submission of Manuscript:

The manuscript/ paper can be submitted via email to [editor@ijcaonline.org](mailto:editor@ijcaonline.org). The email must bear the subject line "IJCA: Paper Submission". A maximum of 3 co-authors can participate in any IJCA paper submission. A maximum of 8 pages are allowed for any paper/ manuscript. Manuscripts submitted to this journal will be deemed as they have not been published and are not under consideration for publication elsewhere.

**Preparation of manuscript:** A covering letter must accompany the submission and should include the name, address, telephone number and email address of the corresponding author. The letter should also contain a statement justifying that it has not been published and submitted for publication elsewhere in English. If you face problems with paper submission, please feel free to contact the editor at the publisher at [editor@ijcaonline.org](mailto:editor@ijcaonline.org).

**Paper Template:** Publication of any articles/ manuscript in International Journal of Computer Applications requires strict conformance to the paper template. However, initial submission of an article or manuscript for review need not be compliant with the template.

Once the paper is selected, the authors will be asked to submit the camera-ready paper. The camera-ready paper is the final version of the article/ manuscript that will be published in the International Journal of Computer Applications Digital Library. While submitting the camera-ready, the authors must take extreme care so that the paper strictly conforms to the prescribed template of International Journal of Computer Applications. The camera-ready paper template can be downloaded from <http://www.ijcaonline.org/documents/template.doc>.

### Formal Conditions of Acceptance:

1. Papers will only be published in English.
2. Previous presentation at a conference, or publication in another language, should be disclosed.
3. All papers are refereed, and the Editor reserves the right to refuse any typescript, whether on invitation or otherwise, and to make suggestions and/or modifications before publication.

### Copyright Transfer:

Once any manuscript is selected for publication in International Journal of Computer Applications, the authors must submit the copyright transfer document to IJCA. The copyright form is available at <http://www.ijcaonline.org/documents/IJCACopyrightForm.doc>.

Authors are responsible for ensuring that nothing in their papers infringes any existing copyright. If previously copyrighted material is included, authors must provide evidence that the copyright holder has given permission for its use. A provision for the same is available in the IJCA Copyright transfer document.

**Final Checklist:** Before submitting your paper, please make sure that the following requirements have all been met:

- Spell and grammar check has been performed.
- There are no word breaks at the end of lines.
- References are according to the instructions.
- References appear consecutively in the paper.
- References are listed alphabetically.



9 78 - 03 - 00747 - 07 - 0

Published By:  
Foundation of Computer Science  
244 Fifth Avenue, Avenue, Suite #1526,  
New York, NY 10001

**Indexing Partners: Google Scholar, CiteSeer, UlrichsWeb, DDAJ and CSA Technology Research Database, ProQuest**

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that the copies are not made or distributed for profit or commercial advantage and that copies bear the notices and full citation on the first page. Copyrights for components of this work owned by others must be honored. Abstracting with credit is permitted. To copy otherwise, to republish, to post on servers or to redistribute to lists requires prior specific permission and / or a fee.