

JOURNAL OF WATER AND LAND DEVELOPMENT

e-ISSN 2083-4535



Polish Academy of Sciences (PAN), Committee on Agronomic Sciences Section of Land Reclamation and Environmental Engineering in Agriculture Institute of Technology and Life Sciences (ITP) JOURNAL OF WATER AND LAND DEVELOPMENT 2020, No. 47 (X–XII): 135–141 https://doi.org/10.24425/jwld.2020.135040

Available (PDF): http://www.itp.edu.pl/wydawnictwo/journal; http://journals.pan.pl/jwld

Received 03.03.2020 Reviewed 20.04.2020 Accepted 03.06.2020

River water quality assessment in East Java, Indonesia

Elida NOVITA⁽¹⁾, Hendra A. PRADANA⁽¹⁾, Melia I. PUSPITASARI⁽²⁾, Bambang H. PURNOMO⁽¹⁾, Amelia I. PUSPITASARI⁽²⁾

For citation: Novita E., Pradana H.A., Purnomo B.H., Puspitasari A.I. 2020. River water quality assessment in East Java, Indonesia. Journal of Water and Land Development. No. 47 (X–XII) p. 135–141. DOI: 10.24425/jwld.2020.135040.

Abstract

This study aims to assess the water quality and determine the pollution index of the Bedadung River in the urban-area segment of Jember Regency, East Java. The sampling in the urban segment of Jember was conducted in May 2019 at five different locations, namely Slamet Riyadi Street, Mastrip Street, Bengawan Solo Street, Sumatra Street, and Imam Bonjol Street. The pollution index assessment refers to the Decree of the State Minister for the Environment of Indonesia Republic number 115 of 2003. The analysis showed that the parameters of *TDS*, *TSS*, pH, *COD*, *BOD*, NH₃-N, Co, Cd, Cu, Zn, H₂S, Cl⁻, SO₄, oil and fats, MBAS, NO₂-N, Fe, Pb, F, Cl₂, NO₃-N, phenol, and As did not exceed the quality standards. The parameters PO₄, CN, total coliform, and faecal coliform were found to breach the quality standards at the 5 water sampling points. Total coliform and faecal coliform were the dominant pollutants in this segment. Therefore, the parameters of PO₄, total coliform, and faecal coliform were considered as indicators of pollution arising from domestic and agricultural activities. The pollution index values for the five sampling locations ranged from 7.21 to 8.23. These scores indicate that the Bedadung River section that passes through the urban segment in Jember is classified as being in the moderately polluted category. This preliminary rapid assessment is therefore one of the considerations for the management of water quality in the Bedadung River section that passes through the urban area of Jember.

Key words: Jember Regency, microbiology parameters, physicochemical parameters, pollution index, the Bedadung River, water quality monitoring

INTRODUCTION

Deterioration in the quality of water resources is one of the most critical problems facing the world today and has an adverse impact on human health. The low quality of drinking water and raw water resources has been a factor in various deaths around the world [BABA, TAYFUR 2011; DWIVEDI 2017; HASEENA et al. 2017; KIDO et al. 2009; PAWARI, GAWADE 2015]. Besides, low public awareness of the environment and increasing economic activity have the potential to exacerbate the levels of pollution already found in water sources [CHEN et al. 2012; LEE et al. 1982]. In general, the sources of this pollution comprise anthropogenic activities in the form of domestic waste, industrialization, population growth, pesticides and fertilizers, or-

ganic and inorganic waste, urban development, and poor water resource management systems [HUANG *et al.* 2017; MATEO-SAGATA *et al.* 2017].

Water pollution is a primary issue in both Asia and Africa owing to the impact on water sources from the low level of sanitation facilities and wastewater treatment units [DWIVEDI 2017; EVANS et al. 2016; YUSTIANI et al. 2018]. This condition is also prevalent in Indonesian territory. There is empirical evidence to show that 44 major rivers in Indonesia, including the Musi, Citarum, Ciliwung, Brantas, and Barito Rivers, do not meet class ii quality standards. Despite this, the territory of Indonesia is estimated to potentially include 6% of the world's sources of fresh water. It had the potential to be the world's fifth-largest fresh water source in 2012 [ADB 2016]. However, an exponential

¹⁾University of Jember, Faculty of <mark>Agricultural Technology, Jalan Kalimatan No. 37, Kampus</mark> Ta<mark>galboto, Jember, Jawa Timur, 68121,</mark> Indonesia

²⁾ University of Jember, Postgraduate, Jalan Kalimatan No. 37, Kampus Tagalboto, Jember, Jawa Timur, 68121, Indonesia

increase in water consumption combined with a deterioration in the quality of water resources has created a range of problems with regard to the supply of clean water [KRANTZBERG *et al.* 2010; LEE *et al.* 1982]. The phenomenon of river or surface water resources pollution is impacted by policies in Indonesia that do not seek to maximize environmental control and monitoring [FULAZZAKY 2014; MARSELINA, BURHANUDIN 2017].

The quality of the water contained in water bodies has a tendency to fluctuate, as shown in the Indonesian Water Quality Index (*WQI*); however, the water quality fell during the period 2015–2017 [KLHK 2018]. The *WQI* presents a concern for the government in East Java. There, the *WQI* value is <40, which places it in the unfavourable category and means improvement must be included as a priority for Indonesia.

Water quality assessment in Bedadung River (Jember Regency) limited on oxygen and organic matter parameter i.e *DO*, *BOD*, and *COD*. The Bedadung River has good function to biodegradable pollutant reduction. It is indicated by reoxygenation rate > deoxygenation rate of the Bedadung River [PRADANA *et al.* 2019a]. Water quality status have to notice physical, chemical, and microbiological parameters.

Decree of the State Minister for the Environment No. 115 of 2003 [Keputusan Menteri Lingkungan Hidup No. 115 tahun 2003] concerning the determination of water quality status permits the use of the pollution index as a basic reference for pollution control. It is preliminary rapid approach which minimize data volume i.e. physical, chemical, and microbiological parameters to describe most of the water quality status. The pollution index results for surface water resources in Indonesia, i.e., rivers and coastal areas, can be used to illustrate the magnitude of the potential pollution [EFFENDI 2016; PUSPITA *et al.* 2016; TALLAR, SUEN 2015; TANJUNG *et al.* 2019].

This study aims to assess the water quality and determine the pollution index of the Bedadung River in an urban-area segment of Jember Regency, East Java. The

assessment can become a consideration for controlling pollution and managing river water quality in urban areas to provide sustainable raw water sources.

MATERIALS AND METHODS

STUDY AREA AND INPUT DATA

Bedadung Watershed is one of the largest watersheds in East Java and includes Jember. The Bedadung River has a total length of 46,875 m. The river passes through an area in Jember that includes the Patrang, Sumbersari, and Kaliwates districts. The land use in Bedadung Watershed comprises forests, settlements, paddy fields, and grasslands [PRADANA et al. 2019a].

The Bedadung River is one of the most strategic rivers in East Java and is located in the Bedadung Watershed in Jember. It is used by the community and stakeholders as a source of both raw water and irrigation water. Therefore, it is used for washing, bathing, and toilet activities [MU-NANDAR, EURIKA 2016]. However, the physical and chemical water quality of the Bedadung River has already been affected by pollution in some districts, including the Patrang, Sumbersari, Kaliwates, and Mangli Districts [NUR-JANAH et al. 2015]. In 2016, the Bedadung River had a very poor category on the parameters of BOD, COD, TSS, and Total Coliform [East Java Environment Agency 2017]. In other cases, PRADANA et al. [2019b] reported that the COD value of the water intake at Jember Regency Municipal Waterworks exceeded the class I quality standards in 2017.

The pollutants in the Bedadung River usually derive from anthropogenic activities such as domestic and residential liquid waste, rubbish, livestock, agriculture, and the activities of small and medium Enterprises. In line with this, AZIZA *et al.* [2018] stated that urban activity is the dominant factor affecting the high pollution load in the Kalijompo River, which is a tributary of the Bedadung River.

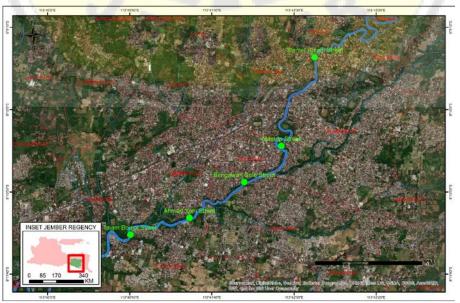


Fig. 1. Sampling location; source: own elaboration

The research sampling for this study was carried out in the Bedadung River, specifically in the urban segment of Jember, in May 2019. The river water was sampled at a total of five locations, i.e., (1) Slamet Riyadi Street – Patrang District; (2) Mastrip Street – Sumbersari District; (3) Bengawan Solo Street – Sumbersari District; (4) Sumatra Street – Sumbersari District; and (5) Imam Bonjol Street – Kaliwates District. It was divided into three categories, i.e., the upstream of the river in Patrang District, the middle of the river in Sumbersari District, and the downstream of the river in Kaliwates District. The river water sampling locations are shown in Figure 1. These locations were selected following a consideration of the types of community activities and land use in the Bedadung Watershed [PRADANA et al. 2019a, b].

MEASUREMENT AND ANALYSIS OF WATER QUALITY

The water sampling was carried out temporarily (grab sampling) at the point of observation [PRADANA et al. 2019a]. The sampling process for the Bedadung River water required a 5 dm³ volume sample, with reference to the SNI 6989.57-2008 procedure regarding surface water sampling procedures. Samples were taken from the previously identified five water sampling points. Observations of the temperature, *DO*, and pH parameters were carried out directly at the locations, while the other parameters were analysed in the laboratory. The various other analytical methods related to water quality parameters as listed in Government Regulation of Indonesia No. 82 of 2001 concerning river pollution control were used as inputs for calculating the pollution index (*PI*) [Peraturan... 2001], and these are given in Table 1.

The water quality parameters were analysed at the Sucofindo Surabaya Laboratory (Ind. Laboratorium Sucofindo Surabaya), which has been accredited by the Committee National Accreditation (Ind. Komite Akreditasi Nasional – (KAN). The results of the parameter analysis were compared to the class I quality standards designated for raw water sources.

WATER POLLUTION INDEX (WPI)

The WPI is one of the determinants of water quality status referred to in Regulation of the State Minister for the Environment No. 115 of 2003. The function of the index is to identify the impact of the pollutant content on surface water quality conditions. This water quality status is employed as a consideration with regard to the utilization of surface water sources and their management efforts. The following data relate to the pollution index equation given as Equation (1) [EFFENDI 2016]. The concentration of water quality in quality standard base on regulation (*j*) uses class *i* quality standards based on Government Regulation of Indonesia Number 82 of 2001 [Peraturan... 2001]. The application of this standard was based on the utilization of Bedadung River water as a raw water resource by several parties.

$$WPI = \frac{\sqrt{\left(\frac{Ci}{Lij}\right)_{M}^{2} + \left(\frac{Cij}{Lij}\right)_{R}^{2}}}{2} \tag{1}$$

Table 1. Standard's values and analytical methods for water quality parameters

Parameter	Unit	Standard	Analytical method		
Temperature	°C	±3	APHA 2550 B 2017		
TDS	mg·dm ⁻³	1000	APHA 2540 C 2017		
TSS	mg·dm ⁻³	50	APHA 2540 D 2017		
pН	-	6–9	APHA 4500-H+-B 2017		
COD	mg∙dm ⁻³	10.0	APHA 5220 B 2017		
BOD	mg·dm ⁻³	2.0	APHA 5210 B 2017		
DO	mg∙dm ⁻³	6.0	APHA 4500-O B 2017		
Ammonia total (NH ₃ -N)	mg∙dm ⁻³	0.5	APHA 4500-NH ₃ -F 2017		
Cobalt (Co)	mg·dm ⁻³	0.2	APHA 3120 B 2017		
Cadmium (Cd)	mg∙dm ⁻³	0.01	APHA 3120 B 2017		
Copper (Cu)	mg·dm ⁻³	0.02	APHA 3120 B 2017		
Zinc (Zn)	mg·dm ⁻³	0.05	APHA 3120 B 2017		
Sulfide (H ₂ S)	mg·dm ⁻³	0.002	APHA 4500-S2-D 2017		
Chlorine (Cl ⁻)	mg·dm ⁻³	0.03	APHA 4500-Cl B 2017		
Sulfate (SO ₄)	mg∙dm ⁻³	400	APHA 4500-SO ₄ 2-E 2017		
Oil and fats	μg·dm ⁻³	1000	APHA 5520 B 2017		
MBAs detergent	μg·dm ⁻³	200	APHA 5540 C 2017		
Phenol	mg·dm ⁻³	1.0	APHA 5530 C 2017		
Nitrite (NO ₂ -N)	mg·dm ⁻³	0.06	APHA 500-NO2-B 2017		
Iron (Fe)	mg·dm ⁻³	0.3	APHA 3120 B 2017		
Lead (Pb)	mg·dm ⁻³	0.03	APHA 3120 B 2017		
Flourine (F)	mg·dm ⁻³	0.5	APHA 4500-F-D 2017		
Chloride (Cl ₂)	mg·dm ⁻³	1.0	APHA 4500-Cl ₂ -B 2017		
Nitrate (NO ₃ -N)	mg·dm ⁻³	10	APHA 4500-NO ₃ -E 2017		
Phosphate (PO ₄)	mg∙dm ⁻³	0.2	APHA 4500-P C 2017		
Manganese (Mn)	mg·dm ⁻³	1.0	APHA 3120 B 2017		
Hexavalent chromium	mg·dm ⁻³	0.05	<mark>АРНА 3</mark> 500-Сr-В 2017		
Cyanide (CN)	mg·dm ⁻³	0.02	APHA 9221 B # 2012		
Arsenic (As)	mg·dm ⁻³	1.0	APHA 3114 B 2017		
Barium (Ba)	mg·dm ⁻³	1.0	APHA 3120 B 2017		
Boron (B)	mg·dm ⁻³	1.0	APHA4500-B-C 2017		
Selenium (Se)	mg·dm ⁻³	0.01	APHA 3114 B 2017		
Mercury (Hg)	mg·dm ⁻³	0.001	APHA 3112 B 2017		
Total coliform	MPN·(100 cm) ⁻¹	1000	APHA 4500-CN-E 2017		
Faecal coliform	MPN·(100 cm) ⁻¹	100	APHA 9221 E # 2012		

Explanations: *TDS* = total dissolved solids, *TSS* = total suspended solids, *COD* = chemical oxygen demand, *BOD* = biological oxygen demand, *DO* = dissolved oxygen, MBAs = methylene blue active substances.

Source: APHA [2012] and APHA [2017].

Where: WPI = water pollution index; Ci = the concentration of water quality measurement (ppm); Cij = the concentration of water quality in quality standard base on regulation (j); (Ci:Lij)M = the maximum value of Ci:Lij; (Ci:Lij)R = the average value of Ci:Lij.

WPI limits for water quality classes are as follows:

- good/meets standard ($0 \le WPI \le 1.0$),
- lightly polluted $(1.0 < WPI \le 5.0)$,
- moderately polluted (5.0 $< WPI \le 10.0$),
- heavily polluted (WPI > 10.0).

RESULTS AND DISCUSSION

WATER QUALITY ANALYSIS

Water quality is closely related to water allocation. In general, physical, chemical, and biological parameters can be used to represent water quality conditions. The various physical, chemical, and microbiological parameter values used are shown in Table 2.



Table 2. The water quality parameters for the Bedadung River in Jember Regency, East Java, Indonesia

D	Unit	Value for station					
Parameter		A	В	С	D	Е	
Temperature	°C	29.5	29	28.5	28.5	29	
TDS	mg·dm ⁻³	154	143	149	153	141	
TSS	mg·dm ⁻³	1.6	1.2	1.2	1.6	1.2	
pН		8.2	8.17	8.15	8.17	8.16	
COD	mg∙dm ⁻³	5.1	3.4	3.4	5.1	3.4	
BOD	mg∙dm ⁻³	1.2	0.82	0.83	1.2	0.85	
DO	mg∙dm ⁻³	5.6	5.4	5.6	5.4	5.4	
Ammonia total (NH ₃ -N)	mg·dm ⁻³	0.032	0.032	0.032	0.032	0.032	
Cobalt (Co))	mg∙dm ⁻³	0.003	0.003	0.003	0.003	0.003	
Cadmium (Cd)	mg∙dm ⁻³	0.003	0.003	0.003	0.003	0.003	
Copper (Cu)	mg∙dm ⁻³	0.003	0.003	0.003	0.003	0.003	
Zinc (Zn)	mg∙dm ⁻³	0.016	0.023	0.011	0.015	0.022	
Sulfide (H ₂ S)	mg∙dm ⁻³	0.02	0.057	0.02	0.02	0.057	
Chlorine (Cl ⁻)	mg∙dm ⁻³	2	3.9	3.9	2	3.9	
Sulphate (SO ₄)	mg·dm ⁻³	11.8	19.3	21.1	5.8	19.9	
Oil and fats	μg∙dm ⁻³	200	200	200	200	200	
MBAS detergent	μg∙dm ⁻³	50	50	50	50	50	
Phenol	mg∙dm ⁻³	0.002	0.002	0.002	0.002	0.002	
Nitrite (NO ₂ -N)	mg∙dm ⁻³	0.005	0.003	0.004	0.005	0.003	
Iron (Fe)	mg·dm ⁻³	0.12	0.072	0.088	0.15	0.062	
Lead (Pb)	mg·dm ⁻³	0.003	0.003	0.003	0.003	0.003	
Flourine (F)	mg∙dm ⁻³	0.48	0.17	0.25	0.25	0.52	
Chloride (Cl ₂)	mg∙dm ⁻³	0.02	0.02	0.02	0.02	0.02	
Nitrate (NO ₃ -N)	mg·dm ⁻³	2.6	1.9	1.8	2.6	2.1	
Phosphate (PO ₄)	mg·dm ⁻³	0.3	0.3	0.3	0.3	0.3	
Manganese (Mn)	mg∙dm ⁻³	0.003	0.003	0.003	0.003	0.003	
Hexavalent chromium	mg·dm ⁻³	0.003	0.003	0.003	0.003	0.003	
Cyanide (CN)	mg·dm ⁻³	0.03	0.03	0.03	0.03	0.003	
Arsenic (As)	mg∙dm ⁻³	0.001	0.001	0.001	0.001	0.001	
Barium (Ba)	mg∙dm ⁻³	0.033	0.028	0.23	0.0457	0.072	
Boron (B)	mg∙dm ⁻³	0.043	0.031	0.031	0.035	0.04	
Selenium	mg∙ <mark>dm⁻³</mark>	0.001	0.001	0.001	0.001	0.001	
Mercury (Hg)	mg∙dm ⁻³	0.001	0.001	0.001	0.001	0.001	
Total coliform	MPN·(100 cm ³) ⁻¹	>1600	>1600	>1600	>1600	>1600	
Faecal coliform	MPN·(100 cm ³) ⁻¹	47	920	>1600	>1600	>1600	

Explanations: A = Slamet Riyadi Street; B = Mastrip Street; C = Bengawan Solo Street; D = Sumatra Street; E = Imam Bonjol Street, the other as in Tab. 1.

Source: own study.

The values for the physical parameters i.e. temperature, total dissolved solids (TDS), and (TSS) do not exceed the class I quality standards, with average values of 28.9°C, 148 mg·dm⁻³, and 1.36 mg·dm⁻³ respectively. The water temperature determines the amount of oxygen dissolved in water, the rate of photosynthesis of aquatic plants, and the metabolism of aquatic organisms. Temperature changes are caused, among others, by the weather, the removal of shaded riverbank vegetation, containment, cooling water discharges, urban stormwater, and the flow of groundwater to rivers [OBADE, MOORE 2018]. The values for TSS and TDS were below the grade I quality standards owing to the influence of water discharge and runoff from the Bedadung River. May 2019 was predicted to be the dry season. TSS was a mineral or suspended sediment that moved in the water, depending on the water flow and rainfall levels. Meanwhile, sediments block light and contain pathogens and retained particles/algal pigments that affect the application and reflection of light in water bodies [Lee *et al.* 1982; OBADE, MOORE 2018]. The potential runoff from domestic activity is low during the dry season [OGDEN *et al.* 2013]. However, the minimum discharge of soil particles from the upstream area of the Bedadung Watershed did not carry over to the water body. These particles predominantly influence the increasing value of *TSS* and *TDS* in the river.

The chemical parameters tend to fluctuate with class I quality standards. The values for pH and dissolved oxygen (DO) values were still within the normal range. Reaction expressed in pH indicates the alkalinity or acidity of a substance, ranked on a scale of 1 to 14: pH < 7 is acidic while pH > 7 is basic, and pH 7.0 is neutral [OBADE, MOORE 2018]. The water at the five observation points in the Bedadung River that passes through the urban segment as water intake of Jember Regency Municipal Waterworkers (Ind. Perusahaan Daerah Air Minum) has a pH value of 8.17, which puts it in the neutral category. This drastic change in pH is influenced by the industrial waste that is discharged directly into water bodies. In line with these parameters, the DO values are classified as normal and almost reached 6 at each water sampling location. The average DO value was 5.48 mg·dm⁻³.

The high *DO* content is influenced by the river profile factors such as topography, river cross-sectional area, water flow velocity, and river rock shape [PRADANA *et al.* 2019a]. The shape of the Bedadung River rocks varies, which creates an increase in the flow turbulence. Flow turbulence works as a factor to increase the potential for oxygen uptake from above the water surface. The source of oxygen in surface water sources is indicated by the value of (*DO*), which is a component that supports photosynthesis and the degradation of organic matter in water bodies [NASHOLM *et al.* 2008; OBADE, MOORE 2018].

Several chemical parameters are used to indicate the presence of organic matter in river water. In this case, chemical oxygen demand (COD) and biological oxygen demand (BOD) indicate biodegradable organics matter. It is identified by BOD/COD in Bedadung River more than 0.1 [PRADANA et al. 2019b]. The mean values of BOD and COD were 4.08 mg·dm⁻³ and 0.98 mg·dm⁻³, respectively. Neither parameter exceeded the grade I quality standards. Points A and D had the same COD values of 5.1 mg·dm⁻³ which were higher than those recorded at the other points. This is due to waste from industrial activities but has little impact on the exposure of COD values to the Bedadung River. The degradation of organic matter and dilution of COD concentrations were also influenced by additional water discharges from various sources such as springs and creeks, as well as variations in the flow velocity due to topographic variations [GUMELAR et al. 2017; PRADANA et al. 2019a; RAHAYU et al. 2018]. In other cases, the BOD values for all points were below the class I quality standards. Therefore, the potential exposure of the water in the Bedadung River to biodegradable organic matter was quite low.

In general, the results of the examination of heavy metal content in the form of Hg, As, Cd, Ni, Fe, and Pb did not exceed the grade I quality standards. The concentrations of heavy metals dissolved in the Bedadung River were therefore relatively low. Heavy metal pollution in water can generally be attributed to electroplating and the mining industry.

Some of the parameters were found to exceed the class I quality standards, namely phosphate (PO₄), cyanide (CN), total coliform, and faecal coli. In this study, CN was found to be distributed equally across all of the observation points, with an average value of 0.03 mg·dm⁻³. This exceeds the grade I quality standards, which stipulate a value of 0.02 mg·dm⁻³. CN contamination derives from industrial waste and is toxic. Another study showed that certain mining activities can also be the cause of rivers' exposure to CN [HIDAYATI *et al.* 2009; WEI *et al.* 2018]. The average phosphate value at each observation point was 0.3 mg·dm⁻³. The class I quality standard for this parameter is 0.2 mg·dm⁻³. Therefore, based on the results of the examination, the phosphate content in the river that passes through this segment is classified as heavy.

The quality standard is the limit of orthophosphate in the form of phosphate as one of the macronutrient components. This nutrient has a function as a nutrient for phytoplankton [LOH *et al.* 2016; PIRANTI *et al.* 2019]. This type of result is one of the factors that triggers an explosion of algae in water bodies. It is thought that human faeces and the use of fertilizers in farming act as the source of one of the macronutrient components involved in the growth of contamination [MARSELINA, BURHANUDIN 2017; 2018; MASLUKAH *et al.* 2017].

The indications of exposure to pathogenic bacteria can be seen in the microbiological parameters of total coliform and faecal coliform. The average value of total coliform at each observation site was >1600 MPN·(100 cm³)⁻¹. The data show that the total coliform is equally distributed and that the content is high in the section of Bedadung River that passes through the urban segment of Jember. On the other hand, however, different results were found with respect to the faecal coli values. The dynamics of faecal coli exposure varied between the upstream and downstream observation sites. In general, the faecal coli values exceeded the grade I quality standards, although there were differences in the inspection results between the upstream and downstream sections. The faecal coliform values at points A and E were 47 MPN· $(100 \text{ cm}^3)^{-1}$ and >1600 MPN· $(100 \text{ cm}^3)^{-1}$. The faecal coliform accumulated at the downstream point. This is supported by GENISA and AULIANDRI [2018], who found that the distribution of faecal coli was influenced by the accumulation of domestic activities, land use, and the presence of sediment in the downstream of the Musi River.

The examination of the water quality of the Bedadung River that passed through Jember found that the physical, chemical, and microbiological parameters generally exceeded the class I quality standards. In this segment, the Bedadung River is categorized as class III and is not viable for use as a source of clean water and drinking water. However, almost 90% of the 35 parameters were found to be good and can thus be categorized as meeting the class I quality standards. A total of 89% of the physical and chemical parameters met the class I quality standards, including

TDS, *TSS*, pH, *COD*, *BOD*, NH₃-N, Co, Cd, Cu, Zn, H₂S, Cl⁻, SO₄, oil and fats, MBAs, NO₂-N, Fe, Pb, F, Cl₂, NO₃-N, phenol, and As. The percentage of chemical and microbiological parameters that passed the class I quality standard was 11%, in the form of PO₄, CN, total coliform, and faecal coliform. These empirical findings indicate that the purification ability of the Bedadung River based on its physical and chemical components remains relatively good, despite the pollution caused by exposure to total coliform and faecal coliform. In line with this phenomenon, the potential for organic matter to decompose from the upstream part of Bedadung River is still good, based on its reoxygenation rate of 0.053 mg·day⁻¹ [PRADANA *et al.* 2019a].

WATER POLLUTION INDEX

The assessment of water quality status is used as a benchmark in the allocation of water quality management. One method that can be used to assess water quality is based on exposure to pollutants. This involves a comparison of the physical, chemical, and microbiological parameters against the quality standards [EFFENDI 2016; TANJUNG et al. 2019]. It is a fairly comprehensive approach to consider a form of pollution control based on the source of pollution.

The WPI values at the five sampling locations were in the range 7.20 to 8.23, as shown in Figure 2. This indicates that the Bedadung River water that passes through the urban segment of Jember is in the moderately polluted category. This is evident from the fact that point A, which is in the upstream part, has a WPI value of 7.20. Points B and C are located in the middle section and have a WPI value of 8.23. Points D and E are located downstream and have WPI values of 7.21. The relatively high WPI values at points B and C reflect the high pressure of domestic activity. These points are located in the Sumbersari sub-district, thus indicating that the Bedadung River is polluted by domestic waste from bathing, washing, and toilet activities in the river. The agricultural waste be in the form of run off are also sources of pollutants in the Bedadung River [PRADANA et al. 2019b].

The assessment is one piece of information used in the management of water quality in the Bedadung River based on the level of pollutants with physical, chemical, and microbiological parameters that exceed the quality standards. The most dominant pollutants come from domestic and agricultural activities. This assumption is reinforced by the exposure to phosphate (PO₄), cyanide (CN), total coliform, and faecal coliform. Based on the result of the calculations in the WPI method, the urban segment in Jember is moderately polluted and certainly does not meet the clean water standard for the community. Therefore, it is necessary to manage water quality and control water pollution by considering the type of land use in urban areas and human behaviour of garbage management. However, the fact that some of the pollutants exceed the quality standard indicates the potential for diseases in the future and excessive phytoplankton growth in the Bedadung River.




Fig. 2. Pollution index for the Bedadung River in the urban-area segment of Jember Regency, east Java, Indonesia; A = Slamet Riyadi Street; B = Mastrip Street; C = Bengawan Solo Street; D = Sumatra Street; E = Imam Bonjol Street; source: own study

CONCLUSIONS

The results from the examination of water quality in the section of the Bedadung River that passes through Jember based on its physical, chemical, and microbiological parameters generally exceed the grade I quality standards. Nearly 90% of the 35 parameters examined were found to be in a good condition and meet the quality standards of grade I. In addition, 89% of the physical and chemical parameters meet the class I quality standards, including TDS, TSS, pH, COD, BOD, NH₃-N, Co, Cd, Cu, Zn, H₂S, Cl⁻, SO₄, oil and fats, MBAs, NO₂-N, Fe, Pb, F, Cl₂, NO₃-N, phenols, and As. A total of 11% of the chemical and microbiological parameters exceeded the quality standard of class I, comprising PO₄, CN, total coliform, and faecal coliform. However, it is potentially very dangerous for people to continue using the river as a source of clean water without the water passing through sterilization first.

As a result, the parameters requiring attention are PO₄, total coliform, and faecal coliform as indicators of pollution due to effluent domestic, agricultural, and industrial wastewater. The WPI values obtained at the five sampling locations ranged from 7.21 to 8.23. This means that the section of the Bedadung River that passes through the urban segment of Jember is categorized as moderately polluted. This assessment serves as information in the management of water quality in the Bedadung River based on its exposure to physical, chemical, and microbiological pollutants whose parameters fall outside the applicable quality standards.

ACKNOWLEDGEMENTS

We express our gratitude to the Indonesian Ministry of Higher Education, Research, and Technology Postgraduate Grant Program No. 7/E/KPT/2019 No. 1834/UN25.3.1/LT/2019 in 2018/2019 and Thesis Reworking Program of Jember University No. 11480/UN25/LT/2020. We highly appreciate the support of all related parties who assisted us in completing this research.

REFERENCES

Abbreviation of Indonesian name of East Java Environment Agency 2017. Indonesian title [Work document on environmental management of East Java Province in 2016]. Surabaya. Full Indonesian name of East Java Environment Agency. ISBN 0111244234 pp. 597.

- ADB 2016. Indonesia country water assessment. Manila. Asian Development Bank. ISBN 9789292573607 pp. 112.
- APHA 2012. Standards methods for examination of water and wastewater. 22nd ed. New York. American Public Health Association (APHA) American Water Works Association (AWWA) Water Environment Federation (WEF). ISBN 9780875530130 pp. 724.
- APHA 2017. Standards methods for examination of water and wastewater. 23rd ed. New York. American Public Health Association (APHA) American Water Works Association (AWWA) Water Environment Federation (WEF). ISBN 978-0875532875 pp. 1796.
- AZIZA S.N., WAHYUNINGSIH S., NOVITA E. 2018. Beban pencemaran Kali Jompo di Kecamatan Patrang-Kaliwates Kabupaten Jember [Pollution load of Kali Jompo in Patrang Kaliwates District Jember regency]. Jurnal Agroteknologi. Vol. 12. Iss. 1 p. 100–106. DOI 10.19184/j-agt.v12i1.8340.
- BABA A., TAYFUR G. 2011. Groundwater contamination and its effect on health in Turkey. Environmental Monitoring and Assessment. Vol. 183 (1–4) p. 77–94. DOI 10.1007/s10661-011-1907-z.
- CHEN C.H., LUNG W.S., LI S.W., LIN C.F. 2012. Technical challenges with BOD/DO modeling of rivers in Taiwan. Journal of Hydro-Environment Research. Vol. 6. Iss. 1 p. 3–8. DOI 10.1016/j.jher.2011.08.001.
- KLHK 2018. Indeks kualitas lingkungan hidup tahun 2017 [Environmental quality index in 2017] [online]. Jakarta. Kementarian Linkungan Hidup dan Kehutanan Republik Indonesia pp. 108. [Access 18.10.2018]. Available at: https://www.menlhk.go.id/site/single_post/1551
- DWIVEDI A.K. 2017. Researchers in water pollution: A review. International Serial Directories. International Research Journal of Natural and Applied Sciences (IRJNAS). Vol. 118. Iss. 2 p. 121–122. DOI 10.13140/RG.2.2.12094.08002.
- EFFENDI H. 2016. River water quality preliminariy rapid assesment using pollution index. Procedia Environmental Sciences. Vol. 33 p. 562–567. DOI 10.1016/j.proenv.2016.03.108.
- EVANS A.E.V., HANJRAM M.A., JIANG Y., QADIR M., DRECHSEL P. 2016. Water quality: assessment of the current situation in Asia. International Journal of Water Resources Development. Vol. 28. Iss. 2 p. 202–210. DOI 10.1080/07900627.2012. 669520.
- FULAZZAKY M.A. 2014. Challenges of integrated water resources management in Indonesia. Water. Vol. 6 p. 2000–2020. DOI 10.3390/w6072000.
- GENISA M.U., AULIANDRI L. 2018. Spatial distribution of coliform/Escherichia coli bacteria in downstream of Musi River. A Scientific Journal. Vol. 35. Iss. 3 p. 131–138. DOI 10.20884/1.mib.2018.35.3.750.
- Gumelar A.R., Alamsyah A.T., Alamsyah A.T., Gupta I.B.H., Syahdanul D., Tampi D.M. 2017. Sustainable watersheds: Assessing the source and load of Cisadane River pollution. International Journal of Environmental Science and Development. Vol. 8. No. 7 p. 484–488. DOI 10.20884/1.mib. 2018.35.3.750.
- HASEENA M., MALIK M.F., JAVED A., ARSHAD S., ASIF N., ZULFIQAR S., HANIF J. 2017. Water pollution and human health. International Journal of Scientific & Technology Research. Vol. 1. Iss. 3 p. 16–19. DOI 10.18178/jjesd.2017.8.7.1001.
- HIDAYATI N., JUHAETI T., SYARIF F. 2009. Mercury and cyanide contaminations in the gold mine environment and possible solution of cleaning up by using phytoextraction. Hayati Journal of Biosciences. Vol. 16. Iss. 3 p. 88–94. DOI 10.4308/hjb.16.3.88.
- Huang J., Yin H., Chapra S.C., Zhou Q. 2017. Modelling dissolved oxygen depression in an urban river in China. Water. Vol. 9 p. 1–19. DOI 10.3390/w9070520.

- Keputusan Menteri Lingkungan Hidup Nomor 115 Tahun 2003 Tentang Penetapan status mutu air [Ministry of Environment Decree No. 115/2003 on Guidelines for determination of water quality status].
- KIDO M., YUSTIAWATI, SYAWAL M.S., HOSOKAWA T., TANAKA S., SAITO T., IWAKUMA T., KURASAKI M. 2009. Comparison of general water quality of rivers in Indonesia and Japan. Environmental Monitoring and Assessment. Vol. 156 p. 317–329. DOI 10.1007/s10661-008-0487-z.
- KLHK 2018. Indeks kualitas lingkungan hidup tahun 2017 [Environmental quality index in 2017] [online]. Jakarta. Kementarian Linkungan Hidup dan Kehutanan Republik Indonesia pp. 108. [Access 18.10.2018]. Available at: https://www.menlhk.go.id/site/single_post/1551
- Krantzberg G., Tanik A., Antunes do Carmo J.S., Indarto A., Ekdal A. 2010. Advances in water quality control. ISBN 9781935068082 pp. 338.
- LEE G.F., JONES R.A., NEWBRY B.W. 1982. Water quality standard and water quality. Journal Water Pollution Control Federation. p. 1132–1140. DOI 10.2307/25041632.
- LOH P.S., CHEN C.A., ANSHARI G.Z., LOU J., WANG J., WANG S., WANG B. 2016. Sedimentary organic matter and phosphate along the Kapuas River (West Kalimantan, Indonesia). Journal of Chemistry. Vol. 9. DOI 10.1155/2016/6874234.
- MARSELINA M., BURHANUDIN M. 2017. Trophic status assesment of Saguling Reservooir, Upper Citarum Masin, Indonesia. Air, Soil and Water Research. Vol. 10 p. 1–8. DOI 10.1177/1178622117746660.
- MARSELINA M., BURHANUDIN M. 2018. Phosphorus load concentration in tropical climates reservoir for each water quantity class. Journal of Water and Land Development. No. 36 (I–III) p. 99–104. DOI 10.2478/jwld-2018-0010.
- MASLUKAH L., YULINA, WULANDARI S., RATNASARI H.K. 2017. The concentration of dissolved phosphate in water mass and sediment study cases in Serang and Mlonggo River. International Journal of Marine and Aquatic Resource Conservation and Co-Existence. Vol. 2. Iss. 1 p. 18–22. DOI 10.14710/ijmarcc.2.1.p.
- MATEO-SAGATA J., MARJANI ZADEH S., TURRAL H. 2017. Water pollution from agriculture: A global review. Rome—Colombo. FAO, IWMI. ISBN 9789251307298 pp. 35.
- MUNANDAR K., EURIKA N. 2016. Keanekaragaman Ikan yang Bernilai Ekonomi dan Kandungan Logam Berat Pb dan Cd pada Ikan Sapu-Sapu di Sungai Bedadung Jember [Diversity of fish economic value and heavy metal Pb and Cd content in fish Hypostomus plecostomus in River Bedadung of Jember] [online]. In: Proceeding Biology Education Conference. Surakarta, Indonesia, March 2016. Vol. 13. No. 1 p. 717–722. [Access 20.10.2018]. Available at: https://jurnal.uns.ac.id/prosbi/article/view/5888
- Nasholm T., Kielland K., Canereg U. 2008. Uptake of organic nitrogen by plants. New Phytologist. Vol. 182. Iss. 1 p. 31–48. DOI 10.1111/j.1469-8137.2008.02751.x.
- NURJANAH U., IBROHIM, DAHLIA. 2015. Studi keanekaragaman makrobentos sebagai bioindikator kualitas air Sungai Bedadung Jember. Di: Prosiding Seminar Nasional Biologi [Study of macrozoobenthos diversity as a bioindicator of Bedadung Jember river water quality. In: Proceedings of the National Seminar on Biology]. Surabaya, Indonesia p. 202–209.
- OBADE V.D.P., MOORE R. 2018. Synthesizing water quality indicators from standardized geospatial information to remedy water security challenges: A review. Environment International. Vol. 119. Iss. 6 p. 220–231. DOI 10.1016/j.envint. 2018.06.026.
- OGDEN F.L., CROUCH T.D., STALLARD R.F., HALL J.S. 2013. Effect of land cover and use on dry season river runoff, runoff efficiency, and peak storm runoff in the seasonal tropics of

- Central Panama. Water Resources Research. Vol. 49. Iss. 12 p. 8443–8462. DOI 10.1002/2013WR013956.
- PAWARI M.J., GAWADE S. 2015. Groundwater pollution & its consequences. International Journal of Engineering Research and General Science. Vol. 3. Iss. 4 p. 2007–2010. DOI 10.1007/BF02484718.
- Peraturan Pemerintah Republik Indonesia Nomor 82 tahun 2001 tentang pengelolaan kualitas air dan pengendalian pencemaran air [Government Regulation of Indonesia No. 82/2001 on water quality and water pollution management] [online]. [Access 15.02.2020]. Available at: http://web.ipb.ac.id/~tml_atsp/test/PP%20RI%20NO_82_TA HUN_2001.pdf
- PIRANTI A., WALUYO G., RAHAYU D.R.U.S. 2019. The possibility of using Lake Rawa Pening as a source of drinking water.

 Journal of Water Land Development. No. 41 (IV–VI) p. 111–119. DOI 10.2478/jwld-2019-0034.
- PRADANA H.A., NOVITA E., WAHYUNINGSIH S., PAMUNGKAS R. 2019a. Analysis of deoxygenation and reoxygenation rate in the Indonesia River: A case study: Bedadung River East Java. In: IOP Conference Series: Earth and Environmental Science, Volume 243, The First International Conference on Environmental Geography and Geography Education (ICEGE). 17–18 November 2018, University of Jember, East Java, Indonesia. Vol. 243. DOI 10.1088/1755-1315/243/1/012006.
- PRADANA H.A., WAHYUNINGSIH S., NOVITA E., HUMAYRO A. 2019b. Identifikasi kualitas air dan beban pencemaran Sungai Bedadung di intake instalasi pengolahan air PDAM Kabupaten Jember [Identification of the water quality and pollution load Bedadung River in water treatment plants intake of Jember Regency Municipal Waterworks]. Jurnal Kesehatan Lingkungan Indonesia. Vol. 18. Iss. 82 p. 135–143. DOI 10.14710/jkli.18.2.135-143.
- Puspita I., Ibrahimi L., Hartono D. 2016. Influence of the behavior of citizens residing in riverbanks to the decrease of water quality in the river of Karang Anyar Tarakan City. Journal of People and Environment. Vol. 23. Iss. 2 p. 249–258. DOI 10.22146/jml.18797.
- RAHAYU Y., JUWANA I., MARGANINGRUM D. 2018. Kajian perhitungan beban pencemaran air Sungai di Daerah Aliran Sungai (DAS) Cikapundung dari sektor domestik [Study of calculation of river water pollution in Cikapundung Watersheds from the domestic sector]. Jurnal Rekayasa Hijau. Vol. 2. Iss. 1 p. 61–71. DOI 10.26760/jrh.v2i1.2043.
- SNI 6989.57-2008. Tata cara pengambilan contoh air permukaan. Standar Nasional Indonesia [Procedure for surface water sampling Indonesian National Standard No. 6989.57]. Badan Standarisasi Nasional (BSN). Indonesia.
- TALLAR R.Y., SUEN J.P. 2015. Identification of waterbody status in Indonesia by using predictive index assessment tool. International Soil and Water Conservation Research. Vol. 3. Iss. 3 p. 224–238. DOI 10.1016/j.iswcr.2015.06.009.
- TANJUNG R.H.R., HAMUNA B., ALIANTO 2019. Assessment of water quality and pollution index in coastal waters of Mimika, Indonesia. Journal of Ecological Engineering. No. 20(2) p. 87–94. DOI 10.12911/22998993/95266.
- WEI W., MA R., SUN Z., ZHOU A., BU J., LONG X., LIU Y. 2018. Effects of mining activities on the release of heavy metals (HMs) in a typical mountain headwater region, the Qinghai-Tibet Plateau in China. International Journal of Environmental Research and Public Health. Vol. 15. Iss. 1987 p. 1–19. DOI 10.3390/ijerph15091987.
- YUSTIANI Y.M., WAHYUNI S., ALFIAN M.R. 2018. Investigation on the deoxygenation rate of water of Cimanuk river, Indramayu, Indonesia. Rayasan Journal of Chemistry. Vol. 11. Iss. 2 p. 475–481. DOI 10.31788/RJC.2018.1121892.